


### Overview


#### HP EliteDesk 8 Mini G2i Desktop AI PC

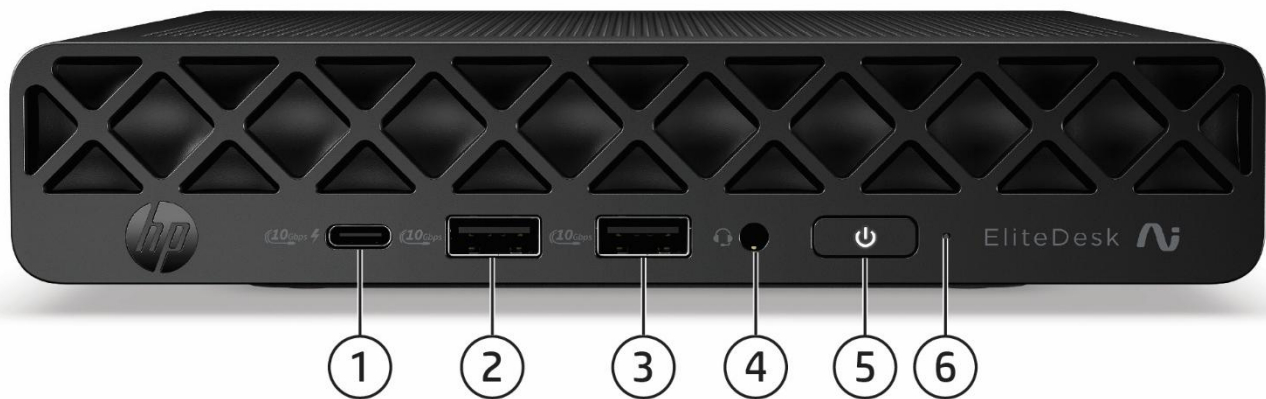

- |                                                                                     |                                                        |
|-------------------------------------------------------------------------------------|--------------------------------------------------------|
| 1. Type-C® SuperSpeed USB 10G Gbps signaling rate port (charge support up to 5V/3A) | 4. Combo Audio Jack with CTIA and OMTP headset support |
| 2. Type-A SuperSpeed USB 10Gbps signaling rate port                                 | 5. Dual-state power button                             |
| 3. Type-A SuperSpeed USB 10Gbps signaling rate port                                 | 6. SSD activity light                                  |

### Overview

#### HP EliteDesk 8 Mini G2i Desktop AI PC

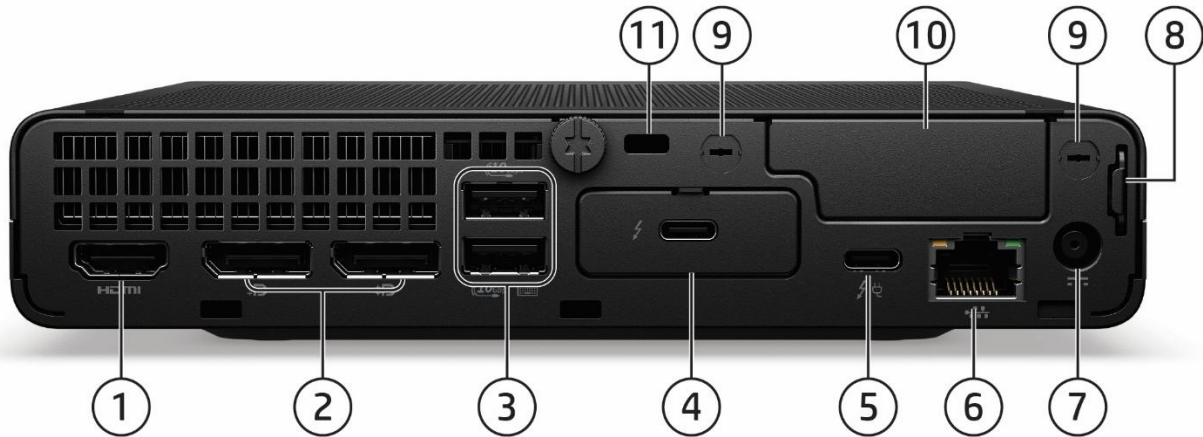

1. HDMI port 2.1TMDs 6Gbps
2. (2) Dual-Mode DisplayPort™ 2.1 HBR3 (DP++)
3. (2) Type-A SuperSpeed USB 10Gbps signaling rate port (Supporting wake from S4 with keyboard/mouse connected and enabled in BIOS)
4. (1) Flex Port 1, choice of:
  - HDMI 2.1
  - VGA
  - DisplayPort™ 2.1
  - Fiber NIC 1Gbps<sup>1</sup>
  - Serial<sup>2</sup>
  - Intel® I226V 2.5 Gigabit Network Connection LOM (non-vPro)
  - Dual Type A SuperSpeed USB 5Gbps signaling rate port
  - Dual USB Type-C 10Gbps
  - Thunderbolt 4.0 (shown in the image)
5. TBT4 with Alt mode and 100W Power in
6. RJ-45 network connector
7. Power connector
8. Retractable Padlock loop
9. External WLAN antenna opening<sup>3</sup>
10. (1) Flex Port 2<sup>3</sup>, choice of:
  - Serial
  - HP video port extender (shown in the image)
  - Dual Type-A SuperSpeed USB 5Gbps signaling rate port
  - NVIDIA® GeForce RTX™ 5050 discrete Graphics

#### Not shown

##### Slots

- (1) Internal M.2 2230 connector for WLAN
- (3) Internal M.2 SSD storage 2280 connector<sup>4</sup>

##### Mounting

- Support for
- Dual VESA Sleeve V4 Standalone
  - Quick Release Bracket
  - B200/B300/B500/B550/B560/B600 Mounting bracket
  - Integrated Work Center Stand
  - HP Single Monitor Arm

1. Fiber NIC 1Gbps cards would not be available in some selected Europe countries and Korea.

2. Sold separately or as an optional feature - Not sold in every region.

3. Must be configured at time of purchase.

4. 3<sup>rd</sup> SSD must be configured at the time of purchase

**NOTE:** SPO (Single Power On) feature only available when platform config in 35W CPU with Thunderbolt cable plugged in native Thunderbolt port via selected HP series 7 pro monitors or HP series 5 pro monitors.

**NOTE:** Thunderbolt flex module does not support SPO (Single Power On) feature.

Features

PRODUCT NAME

HP EliteDesk 8 Mini G2i Desktop Next Gen AI PC

OPERATING SYSTEM

|              |                                                                                                   |
|--------------|---------------------------------------------------------------------------------------------------|
| Preinstalled | Windows 11 Pro <sup>1</sup>                                                                       |
|              | Windows 11 Pro Education <sup>1</sup>                                                             |
|              | Windows 11 Home - HP recommends Windows 11 Pro for business <sup>1</sup>                          |
|              | Windows 11 Home Single Language - HP recommends Windows 11 Pro for business <sup>1</sup>          |
|              | Windows 11 Pro (Windows 11 Enterprise (available with a Volume Licensing Agreement)) <sup>1</sup> |
|              | FreeDOS                                                                                           |

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

### Features

#### PROCESSORS

##### Intel® Core Ultra Processor

Intel® Core™ Ultra 9-386H Processor with Intel® UHD Graphics 4Xe (up to 4.9GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 18MB Intel® Smart Cache LLC, 16 Cores & threads, NPU 50 TOPs) 65W, Supports Intel® vPro® Technology<sup>2</sup>

Intel® Core™ Ultra 7-366H Processor with Intel® UHD Graphics 4Xe (up to 4.8GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 18MB Intel® Smart Cache LLC, 16 Cores & threads, NPU 50 TOPs) 65W, Supports Intel® vPro® Technology<sup>2</sup>

Intel® Core™ Ultra 7-356H Processor with Intel® UHD Graphics 4Xe (up to 4.7GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 18MB Intel® Smart Cache LLC, 16 Cores & threads, NPU 50 TOPs) 65W

Intel® Core™ Ultra 7-355 Processor with Intel® UHD Graphics 4Xe (up to 4.7GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 12MB Intel® Smart Cache LLC, 8 Cores & threads, NPU 49 TOPs) 55W

Intel® Core™ Ultra 5-336H Processor with Intel® UHD Graphics 4Xe (up to 4.6GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 18MB Intel® Smart Cache LLC, 12 Cores & threads, NPU 47 TOPs) 65W, Supports Intel® vPro® Technology<sup>2</sup>

Intel® Core™ Ultra 5-335 Processor with Intel® UHD Graphics 4Xe (up to 4.6GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 12MB Intel® Smart Cache LLC, 8 Cores & threads, NPU 47 TOPs) 55W, Supports Intel® vPro® Technology<sup>2</sup>

Intel® Core™ Ultra 5-325 Processor with Intel® UHD Graphics 4Xe (up to 4.5GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 12MB Intel® Smart Cache LLC, 8 Cores & threads, NPU 47 TOPs) 55W

Intel® Core™ Ultra 5-322 Processor with Intel® UHD Graphics 4Xe (up to 4.4GHz with Intel® Turbo Boost<sup>1</sup> Max Technology, 12MB Intel® Smart Cache LLC, 6 Cores & threads, NPU 46 TOPs) 55W

1. Intel® Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system. See <http://www.intel.com/technology/turboboost> for more information.

2. Intel vPro® requires Windows 10 Pro 64 bit or higher, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or Wi-Fi 6E WLAN and TPM 2.0. Some functionality requires additional 3rd party software in order to run. Features of vPro® Essentials and Enterprise vary. See <http://intel.com/vpro>.

### Features

#### GRAPHICS

##### Integrated Intel® Graphics

|                                      |
|--------------------------------------|
| Intel® UHD Graphics 4Xe <sup>1</sup> |
|--------------------------------------|

##### Optional Discrete Graphics Solutions

|                                                                |
|----------------------------------------------------------------|
| NVIDIA® GeForce® RTX 5050 8GB GDDR7 Graphics card <sup>2</sup> |
|----------------------------------------------------------------|

1. Xe is Intel LPGA Graphics Architecture, one Xe-core represents 16EU.
2. Support up to 7 displays via native video ports, a configurable Flex IO port and selected discrete graphics on Mini.

#### Adapters and Cables

|                       |
|-----------------------|
| HP DisplayPort™ Cable |
|-----------------------|

|                                |
|--------------------------------|
| HP DisplayPort™ to VGA Adapter |
|--------------------------------|

|                               |
|-------------------------------|
| HP USB to Serial Port Adapter |
|-------------------------------|

|                           |
|---------------------------|
| HP USB-C® to HDMI Adapter |
|---------------------------|

|                                      |
|--------------------------------------|
| HP USB-C® to DisplayPort™ Adapter G2 |
|--------------------------------------|

|                    |
|--------------------|
| HP 1.8m HDMI Cable |
|--------------------|

|                                               |
|-----------------------------------------------|
| 1m Thunderbolt 4™ Cable (100W power delivery) |
|-----------------------------------------------|

#### STORAGE

**NOTE:** Starting November 1, 2023, HP PCs with Windows require Windows to be installed on SSD.

HDD can only be configured as additional data drives and not as the boot drive.

**NOTE:** SATA RAID and NVME RAID can be supported simultaneously when customers configure on their own.

#### M.2 PCIe NVMe Solid State Drives (SSD)<sup>1</sup>

|                             |
|-----------------------------|
| 256GB M.2 2280 PCIe NVM SSD |
|-----------------------------|

|                              |
|------------------------------|
| 512GB M.2 2280 PCIe NVMe SSD |
|------------------------------|

|                            |
|----------------------------|
| 1TB M.2 2280 PCIe NVMe SSD |
|----------------------------|

|                            |
|----------------------------|
| 2TB M.2 2280 PCIe NVMe SSD |
|----------------------------|

|                                             |
|---------------------------------------------|
| 1TB M.2 2280 PCIe NVMe Three Layer Cell SSD |
|---------------------------------------------|

|                                             |
|---------------------------------------------|
| 2TB M.2 2280 PCIe NVMe Three Layer Cell SSD |
|---------------------------------------------|

|                                                   |
|---------------------------------------------------|
| 256GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 SSD |
|---------------------------------------------------|

|                                                   |
|---------------------------------------------------|
| 512GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 SSD |
|---------------------------------------------------|

|                                                 |
|-------------------------------------------------|
| 1TB M.2 2280 PCIe NVMe Self Encrypted OPAL2 SSD |
|-------------------------------------------------|

|                                                 |
|-------------------------------------------------|
| 2TB M.2 2280 PCIe NVMe Self Encrypted OPAL2 SSD |
|-------------------------------------------------|

1. For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows) of system disk is reserved for the system recovery software.

2. Storage DriveLock does not work with Self Encrypting or Optane based storage.

Features

MEMORY

Memory Type

|                                                                  |
|------------------------------------------------------------------|
| DDR5-6400 (Transfer rates up to 6400 MT/s), Max 64 GB, 2 SO-DIMM |
|------------------------------------------------------------------|

- \*NOTE:** Memory modules support data transfer rates up to 6400 MT/s; system speed should follow Intel’s design guideline. Actual data rate is determined by the system configuration.
- \*NOTE:** System architecture design is 2 DIMMS per channel and the population starts from the furthest memory slot from the processor.
- \*NOTE:** Symmetric configurations are required for the 2 DIMMs within the same memory channel.
- \*NOTE:** To achieve optimal memory speed, HP strongly recommends using identical memory modules (e.g., same capacity, same part number and from the same supplier within the same memory channel).
- \*NOTE:** All memory slots are customer accessible.

Memory Configuration

|                 |
|-----------------|
| 16GB (2 x 8GB)  |
| 16GB (1 x 16GB) |
| 32GB (2 x 16GB) |
| 32GB (1 x 32GB) |
| 64GB (2 x 32GB) |

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)

|                                                        |
|--------------------------------------------------------|
| Intel® I219-LM 1 Gigabit Network Connection LOM (vPro) |
| Intel® I226V 2.5 Gigabit Network Connection LOM        |

Wireless

|                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------|
| Intel Wi-Fi 7 BE211 +Bluetooth® 6.0 Wireless Card non-vPro                                                          |
| Intel Wi-Fi 7 BE211 +Bluetooth® 6.0 Wireless Card vPro                                                              |
| Realtek RTL8852CE 802.11ax 2x2 Wi-Fi 6E + Bluetooth® 5.3 Wireless Card (802.11ax 2x2, supporting gigabit data rate) |

- NOTE:** Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires compatible Windows 11 OS, compatible processor, and separately purchased Wi-Fi 7 router to support backwards compatibility with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported.
- NOTE:** Wi-Fi 6E requires a Wi-Fi 6E router, sold separately to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported.
- NOTE:** WiFi-6E might be restricted by local regulation and only available in countries where Wi-Fi 6E is supported. HP will enable countries in the future by upgrading BIOS in default as the technology becomes available in more regions.
- NOTE:** External Antenna is supported on Desktop Mini to strengthen the quality of networking and only available at the time of purchase.

Features

KEYBOARDS AND POINTING DEVICES

Keyboards

|                                                               |
|---------------------------------------------------------------|
| HP 175 Wired Keyboard                                         |
| HP 175 AntiMicrobial Wired Keyboard <sup>1</sup> (China Only) |

1. Available in China only.

Keyboard and Mouse Combo

|                                          |
|------------------------------------------|
| HP 275 Wireless Keyboard and Mouse Combo |
|------------------------------------------|

**NOTE:** V2 keyboards contain copilot\* shortcut key.  
\*Copilot in Windows requires Windows 11. Some features require an NPU. Timing of feature delivery and availability varies by market and device. Requires Microsoft account to log in. Where Microsoft in Windows is not available, the Copilot key will lead to the Bing search engine. Use of Recall requires customer authentication using Windows Hello Enhanced Sign in Security (ESS) which requires a fingerprint reader or facial recognition camera and may not be supported on all platforms. See <http://aka.ms/WindowsAIFeatures>.

Mouse

|                                                            |
|------------------------------------------------------------|
| HP 175 Wired Mouse                                         |
| HP 175 Antimicrobial Wired Mouse <sup>1</sup> (China Only) |

1. Available in China only.

SECURITY

|                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TPM 2.0 endpoint security controller (Nuvoton NPCT760HAEYX / ST-Micro ST33KTPM2X32DKG9). Common Criteria EAL4+ Certified. FIPS 140-3 Level 1 Certified. |
| Solenoid Lock & Intrusion Sensor (optional)                                                                                                             |
| Intrusion Sensor for Mini/AiO (integrated in the PCA, can be enabled/disabled through BIOS)                                                             |
| Support for chassis cable lock devices                                                                                                                  |
| Support for chassis padlocks devices                                                                                                                    |
| Serial, USB enable / disable (via BIOS)                                                                                                                 |
| Serial, parallel, USB enable / disable (via BIOS)                                                                                                       |
| Optional USB Port Disable at factory (user configurable via BIOS)                                                                                       |
| Removable media write/boot control                                                                                                                      |
| Power-on password (via BIOS)                                                                                                                            |
| Setup password (via BIOS)                                                                                                                               |

### Features

#### PORTS

##### I/O Ports – Internal Ports

|                                                    |                                                                                                                                     |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Internal shared 3 <sup>rd</sup> SSD/dGPU connector | 1                                                                                                                                   |
| M.2 PCIe                                           | (1) M.2 PCIe 3 x1 2230 (for WLAN)<br>(2) M.2 PCIe 2280<br>(1) M.2 PCIe 2280 (only available with 3 <sup>rd</sup> SSD expansion kit) |

**NOTE:** M.2 SSD attached to CPU is PCIe Gen 5, the other one M.2 are PCIe Gen 4

**NOTE:** For Mini configured with 3<sup>rd</sup> M.2 Storage, can't be configured with discrete graphics.

**NOTE:** For Mini 3<sup>rd</sup> SSD is only available on selected base units at the time of purchase.

##### Standard User Accessible Ports

|                                                                               |                                                                                                    |
|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Type-A SuperSpeed USB 10 Gbps signaling rate port                             | 2(front)<br>2 (rear)                                                                               |
| Type-C® SuperSpeed USB 10Gbps signaling rate port (charge supports up to 15W) | 1 (front)                                                                                          |
| Thunderbolt™ 4.0 with Alt Mode DisplayPort™ and 100W Power intake             | 1 (rear)                                                                                           |
| Video <sup>1</sup>                                                            | 2 DisplayPort™ 2.1 HBR3<br>1 HDMI 2.1 (TMDS 6Gbps)<br>1 Thunderbot™ 4.0 with Alt Mode DisplayPort™ |
| Audio                                                                         | 1 Combo Audio Jack with CTIA and OMTP headset support (front)                                      |

1. For actual resolution supported, refer to the Graphics section of this document.

##### (1) Flexible Port 1, choice of one of the following<sup>1</sup>:

|                                                                          |                                       |
|--------------------------------------------------------------------------|---------------------------------------|
| Dual SuperSpeed USB Type-A 5 Gbps signaling rate port                    | 1                                     |
| Dual SuperSpeed USB Type-C 10Gbps signaling rate port with 15W power out | 1                                     |
| Thunderbolt™ 4.0                                                         | 1                                     |
| Video                                                                    | 1 DisplayPort™ 2.1 or HDMI 2.1 or VGA |
| Serial                                                                   | 1                                     |
| Fiber NIC                                                                | 1x1 Gbps NIC                          |
| RJ-45 Ethernet                                                           | 1 x2.5GbE NIC                         |

1. Sold separately or as an optional feature.

2. Occupies a PCIe slot on TWR/SFF.

**NOTE:** Integrated graphics support up to max 4 display signals out of 5 video output ports.

Support up to 6 out of 7 display outputs at a time when configured with 1 optional video port flex IO and 1 HP Video Port Extender.

Support up to 7 out of 8 display outputs at a time when configured with 1 optional video port flex IO and discrete graphic card.

Features

(1) Flexible Port 2, choice of one of the following<sup>1</sup>:

|                                                      |   |
|------------------------------------------------------|---|
| Dual Type-A SuperSpeed USB 5Gbps signaling rate port | 1 |
| Serial                                               | 1 |
| Discrete Graphic                                     | 1 |
| HP Video Port Extender                               | 1 |

1.Must be configured at time of purchase

USB SPECIFICATION AND MARKETING NAME MAPPING TABLE

| Marketing Name                       | Technical Terminology |
|--------------------------------------|-----------------------|
| Hi-Speed USB 480Mbps signaling rate  | USB 2.0               |
| SuperSpeed USB 5Gbps signaling rate  | USB 3.2 Gen 1         |
| SuperSpeed USB 10Gbps signaling rate | USB 3.2 Gen 2         |
| SuperSpeed USB 20Gbps signaling rate | USB 3.2 Gen 2x2       |

### Features

#### SOFTWARE COMPONENTS AND APPLICATIONS WITH 7

##### Software

Buy Microsoft Office (Sold Separately)<sup>1</sup>  
Edge Customization  
HP Connection Optimizer  
HP Desktop Support Utilities (Desktops Only)  
HP Notifications  
HP PC Hardware Diagnostics UEFI  
HP PC Hardware Diagnostics Windows  
HP Privacy Settings  
HP Services Scan<sup>2</sup>  
HP Support Assistant<sup>3</sup>  
HSA Fusion for Commercial  
HSA Telemetry for Commercial  
myHP (SFF & TWR) myHP with Multicamera support (AIO & Mini)<sup>4</sup>  
Poly Camera Pro (AIO Only)  
Poly Studio Desktop<sup>5</sup>  
HP IQ<sup>6</sup>

##### Manageability Features

HP Client Catalog (download)<sup>7</sup>  
HP Client Management Script Library (download)<sup>8</sup>  
HP Cloud Recovery<sup>9</sup>  
HP Connect for Microsoft Endpoint Manager<sup>10</sup>  
HP Driver Packs (download)<sup>11</sup>  
HP Image Assistant (download)<sup>12</sup>  
HP Manageability Integration Kit (download)<sup>13</sup>  
HP Patch Assistant (download)<sup>14</sup>

##### Security Features

HP Secured-Core PC Enable<sup>15</sup>  
HP Wolf Security for Business<sup>16</sup> includes:  
HP Sure Admin<sup>17</sup>  
HP Sure Click<sup>18</sup>  
HP Sure Run<sup>19</sup>  
HP Sure Sense<sup>20</sup>  
HP Sure Recover<sup>21</sup>  
HP Sure Start<sup>22</sup>  
HP Tamper Lock<sup>23</sup>

##### BIOS

Absolute Persistence Module<sup>24</sup>  
HP Bios Recovery  
HP BIOS Update via Network  
HP BIOSphere<sup>25</sup>  
HP Secure Erase<sup>26</sup>  
HP DriveLock & Automatic DriveLock  
TPM  
UEFI Self Certification Level: 2.9

### Features

1. Microsoft 365 sold separately and requires Internet access for activation.
2. HP Services Scan automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insights and is available preinstalled on select products, through HP Factory Configuration Services; or it can be downloaded. For more information about how to enable HP Smart Support or for download, please visit <http://www.hp.com/smart-support>.
3. HP Support Assistant is available on Windows. For more information, please visit <http://www.support.hp.com/help/hp-support-assistant>.
4. MyHP with Multicamera support for Mini Desktop PC will only be available on 13th processor and beyond.
5. Poly Studio Desktop requires a Windows OS.
6. HP IQ delivery app is preloaded on select HP PCs; it will be automatically updated to the future featured HP IQ application if you have auto updates enabled in Windows or will be available for download from the Microsoft Store. The future featured HP IQ app uses artificial intelligence. Features vary by configuration. For complete details see [https://support.hp.com/us-en/document/ish\\_13696672-13696717-16](https://support.hp.com/us-en/document/ish_13696672-13696717-16).
7. HP Client Catalog not preinstalled, however available for download at (<https://www.hp.com/us-en/solutions/client-management-solutions.html>).
8. HP Client Management Script Library (<https://www.hp.com/us-en/solutions/client-management-solutions.html#tab=manageability-tools>).
9. HP Cloud Recovery is available for Z by HP, HP Elite and Pro desktops and laptops PCs with Intel® or AMD processors and requires an open, network connection. Note: You must back up important files, data, photos, videos, etc. before use to avoid loss of data. Detail, please refer to: <https://support.hp.com/us-en/document/c05115630>.
10. HP Connect for Microsoft Endpoint Manager is available from the Azure Market Place for HP Pro, Elite, Z and Point-of-Sale PCs managed with Microsoft Endpoint Manager. Subscription to Microsoft Endpoint Manager required and sold separately. Network connection required.
11. HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.
12. HP Image Assistant not preinstalled, however available for download at (<https://ftp.ext.hp.com/pub/caps-softpaq/cmit/HPIA.html>)
13. HP Manageability Integration Kit can be downloaded from [HP Manageability Integration Kit | HP Client Management Solutions](#).
14. HP Patch Assistant available on select HP PCs with the HP Manageability Kit that are managed through Microsoft System Center Configuration Manager. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>.
15. Secured-Core PC Enable requires an Intel® vPro®, AMD Ryzen™ Pro processor or Qualcomm® processor with SD850 or higher and requires 8 GB or more system memory. Secured-core PC is enabled from the factory.
16. HP Wolf Security for Business requires Windows 10 or 11 (Pro or Home) or higher, includes various HP security features and is available on HP X, Ultra, Pro, Elite, Engage and Workstation products. See product details for included security features.
17. HP Sure Admin requires HP G8 or newer platforms, Windows 10 or higher, HP BIOS, HP Manageability Kit or KMS Service from <http://www.hp.com/go/clientmanagement> and HP Sure Admin Local Access Authenticator.
18. HP Sure Click requires Windows 10 Pro or higher or Enterprise. See [https://bit.ly/2PrLT6A\\_SureClick](https://bit.ly/2PrLT6A_SureClick) for complete details.
19. HP Sure Run is available on select HP PCs and requires Windows 10 and higher.
20. HP Sure Sense is available on select HP PCs with Windows 10 Pro, Windows 10 Enterprise, Windows 11 Pro, or Windows 11 Enterprise OS.
21. HP Sure Recover is available on select HP PCs and requires Windows 10 or 11 and an open network connection. You must back up important files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data. HP Sure Recover Gen6 with Embedded Reimaging is an optional feature on select HP PCs which requires Windows 10 or 11 must be configured at purchase. You must back up important files, data, photos, videos, etc. before use to avoid loss of data.
22. HP Sure Start is available on select HP PCs and requires Windows 10 and higher.
23. HP Tamper Lock can be Enabled/disabled by customers or IT administrator with administrator authority.
24. Absolute Persistence firmware module is shipped turned off and can only be activated with the purchase a license subscription and full activation of the software agent. License subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. Certain conditions apply. For full details visit: <https://www.absolute.com/about/legal/agreements/absolute/>.
25. HP BIOSphere features may vary depending on the platform and configuration.
26. HP Secure Erase implements the methods outlined in the National Institute of Standards and Technology Special.

Features

UNIT ENVIRONMENT AND OPERATING CONDITIONS

ENERGY STAR® certified models available

ENERGY STAR® certified. EPEAT registered where applicable. Based on US EPEAT registration according to EPEAT criteria and EPEAT Climate+, status and tier level varies by country. Visit <http://www.epeat.net> for more information.  
Low halogen (chassis, all internal components and modules)<sup>1</sup>  
TAA compliant models available

1. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

UNIT ENVIRONMENT AND OPERATING CONDITIONS

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

|                                     |                                                                                                           |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Temperature Range                   | Operating: 50° to 95° F (10° to 35° C) <sup>2</sup><br>Non-operating: -22° to 149° F (-30° to 65° C)      |
| Relative Humidity                   | Operating: 10% to 90% (non-condensing at ambient)<br>Non-operating: 5% to 95% (non-condensing at ambient) |
| Maximum Altitude<br>(unpressurized) | Operating: 5000m<br>Non-operating: 50000ft (15240 m)                                                      |

2. Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

### Features

#### ENVIRONMENTAL & INDUSTRY

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |                     |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|
| <b>Eco-Label Certifications &amp; declarations</b>                         | <p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>• IT ECO declaration</li> <li>• US ENERGY STAR®</li> <li>• US Federal Energy Management Program (FEMP)</li> <li>• EPEAT Gold registered and EPEAT Climate+ attained in the United States. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status in your country.*</li> <li>• TCO Certified</li> <li>• China Energy Conservation Program (CECP)</li> <li>• China State Environmental Protection Administration (SEPA)</li> <li>• Taiwan Green Mark</li> <li>• Korea Eco-label</li> <li>• Japan PC Green label</li> <li>• Commission Regulation (EC) No 617/2013 (ErP Lot 3)</li> </ul> <p><b>NOTE*:</b> Based on US registration according to EPEAT criteria and EPEAT Climate+, status and tier level varies by country. Visit <a href="http://www.epeat.net">http://www.epeat.net</a> for more information.</p> |                     |                     |
| <b>Sustainable Impact Specifications</b>                                   | <ul style="list-style-type: none"> <li>• At least 25% ocean bound plastic-PET Bottle in the Fan and 5% ocean bound plastic-PET Bottle used in the Speaker<sup>1</sup></li> <li>• At least 5% OP-EPS in plastic parts of Enclosure</li> <li>• At least 55% of total post-consumer recycled plastic used in the system<sup>2</sup></li> <li>• 95% recycled plastic used in parts</li> <li>• 20% recycled metal used in parts</li> <li>• 100% recycled Aluminum used in thermal part</li> <li>• 100% Recycled Rare Earth Elements (REE) used in speaker</li> <li>• Outside Box and corrugated cushions are 100% sustainably sourced and recyclable<sup>3</sup></li> <li>• Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable<sup>4</sup></li> <li>• Bulk packaging available<sup>5</sup></li> </ul>                                                                                                                                                                                                                 |                     |                     |
| <b>System Configuration</b>                                                | The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a “Typically Configured Desktop.”                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |                     |
| <b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b> | <b>115VAC, 60Hz</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>230VAC, 50Hz</b> | <b>100VAC, 50Hz</b> |
| Normal (Short idle)                                                        | 6.21 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6.29 W              | 6.05 W              |
| Sleep                                                                      | 2.17 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 2.20 W              | 2.13 W              |
| Off                                                                        | 0.80 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0.81 W              | 0.78 W              |
|                                                                            | <p><b>NOTE:</b> Energy efficiency data listed is for an ENERGY STAR® certified product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® certified configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |                     |
| <b>Heat Dissipation*</b>                                                   | <b>115VAC, 60Hz</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>230VAC, 50Hz</b> | <b>100VAC, 50Hz</b> |
| Normal Operation (Short idle)                                              | 21.2 BTU/hr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 21.4 BTU/hr         | 20.6 BTU/hr         |
| Sleep                                                                      | 7.4 BTU/hr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 7.5 BTU/hr          | 7.3 BTU/hr          |
| Off                                                                        | 2.7 BTU/hr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2.8 BTU/hr          | 2.7 BTU/hr          |

### Features

|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                               |                                                 |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>NOTE:</b> Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. |                                                 |
| <b>40W / 65W</b>                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                               |                                                 |
| <b>Declared Noise Emissions<br/>(in accordance with<br/>ISO 7779 and ISO 9296)</b> | Sound Power<br>(L <sub>WAd</sub> , bels)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                               | Sound Pressure<br>(L <sub>pAm</sub> , decibels) |
| Typically Configured – Idle                                                        | 2.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                               | 17                                              |
| Fixed Disk – Random writes                                                         | 2.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                               | 17                                              |
| <b>35W +65W</b>                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                               |                                                 |
| <b>Declared Noise Emissions<br/>(in accordance with<br/>ISO 7779 and ISO 9296)</b> | Sound Power<br>(L <sub>WAd</sub> , bels)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                               | Sound Pressure<br>(L <sub>pAm</sub> , decibels) |
| Typically Configured – Idle                                                        | 2.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                               | 18                                              |
| Fixed Disk – Random writes                                                         | 2.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                               | 18                                              |
| Longevity and Upgrading                                                            | This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:<br><br>Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                               |                                                 |
| <b>Additional Information</b>                                                      | <ul style="list-style-type: none"><li>• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.</li><li>• This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li><li>• This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li><li>• This product is <b>registered as EPEAT Gold and has attained EPEAT Climate+</b> in the US, status and tier level varies by country, see <a href="http://www.epeat.net">http://www.epeat.net</a></li><li>• Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.</li><li>• This product is 92.7% recycle-able when properly disposed of at end of life.</li></ul> |                                                                                                                               |                                                 |
| <b>Packaging Materials<br/>-Horizontal design</b>                                  | <b>External:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | PAPER/Paper                                                                                                                   | 652 g                                           |
|                                                                                    | <b>Internal:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | PAPER/Molded pulp                                                                                                             | 79 g                                            |
|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | PLASTIC/Polyethylene low density - LDPE                                                                                       | 16 g                                            |
| <b>Packaging Materials<br/>-Vertical design</b>                                    | <b>External:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | PAPER/Corrugated                                                                                                              | 405 g                                           |
|                                                                                    | <b>Internal:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | PAPER/Molded pulp                                                                                                             | 74 g                                            |
|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | PLASTIC/Polyethylene low density - LDPE                                                                                       | 5 g                                             |
|                                                                                    | The plastic packaging material contains at least 30.0% recycled content.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                               |                                                 |
| The corrugated paper packaging materials contain at least 35.0% recycled content.  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                               |                                                 |
| <b>RoHS Compliance</b>                                                             | HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.<br><br>We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.                                                                                                                                                               |                                                                                                                               |                                                 |

### Features

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | <p>We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.</p> <p>To obtain a copy of the HP RoHS Compliance Statement, see: <a href="#">HP RoHS position statement</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Material Usage</b>                       | <p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a>):</p> <ul style="list-style-type: none"> <li>• Asbestos</li> <li>• Certain Azo Colorants</li> <li>• Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>• Cadmium</li> <li>• Chlorinated Hydrocarbons</li> <li>• Chlorinated Paraffins</li> <li>• Formaldehyde</li> <li>• Halogenated Diphenyl Methanes</li> <li>• Lead carbonates and sulfates</li> <li>• Lead and Lead compounds</li> <li>• Mercuric Oxide Batteries</li> <li>• Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>• Ozone Depleting Substances</li> <li>• Polybrominated Biphenyls (PBBs)</li> <li>• Polybrominated Biphenyl Ethers (PBBEs)</li> <li>• Polybrominated Biphenyl Oxides (PBBOs)</li> <li>• Polychlorinated Biphenyl (PCB)</li> <li>• Polychlorinated Terphenyls (PCT)</li> <li>• Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li> <li>• Radioactive Substances</li> <li>• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul> |
| <b>Packaging Usage</b>                      | <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>• Design packaging materials for ease of disassembly.</li> <li>• Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>• Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>• Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>End-of-life Management and Recycling</b> | <p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/recyclers">http://www.hp.com/go/recyclers</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> <p>Global Citizenship Report<br/> <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications<br/> <a href="http://www8.hp.com/us/en/hp-information/environment/ecolabels.html">http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</a></p>                                                                                                                                                                                                                                    |

Features

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | ISO 14001 certificates:<br><a href="http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842">http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842</a> and<br><a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</a>                                                                                                                                                                                           |
| footnotes | <ol style="list-style-type: none"><li>1. Percentage of ocean-bound plastic &amp; PCR contained in each component varies by product.</li><li>2. Recycled plastic content percentage is based on the definition set in EPEAT criteria.</li><li>3. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.</li><li>4. Fiber cushions made from 100% recycled wood fiber and organic materials.</li><li>5. Plastic cushions are made from &gt;90% recycled plastic.</li></ol> |

SERVICE AND SUPPORT

On-site Warranty<sup>1</sup>: One-year (1-1-1) limited warranty delivers one year of on-site, next business day<sup>2</sup> service for parts and labor support. Service offers terms up to 5 years by choosing an optional HP Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>.<sup>3</sup>

- 1. Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.
- 2. On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
- 3. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

CERTIFICATION AND COMPLIANCE

Energy Efficiency Compliance

ENERGY STAR® certified. EPEAT registered where applicable. EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country.

#### PROCESSORS

##### Intel Core Ultra Series 3 Processors 2Q

All HP EliteDesk G2i Business PC featuring this technology include processors that are part of the Intel® Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP Elite series G2i Desktop Business PC.

Intel® Management Engine (ME) v21 – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT includes the following advanced management functions:

- Support for configuration of Intel ME v21 capabilities
- No reset after provisioning
- Support for Intel Enterprise Digital Fence
- The Platform Discovery Utility can now discover these additional Intel products:
  - Public Key Infrastructure
- Profile Editor and Profile Editor Plugin Interface
- Required Permissions for Solutions Framework

#### GRAPHICS

##### Intel® HD Graphics (integrated)

Up to four simultaneous displays, 4K60Hz display concurrent with:

- Single external display up to 8K60Hz, supported by joining two pipes over single port.
- Up to 4x4K60Hz External display (Out of 4 Native video ports + 1 Flex IO option)

##### VGA Controller

Integrated

##### DisplayPort™

Supports up to UHBR20

Support MST (Multi-Stream Transport), Maximum of 3 displays with Daisy-Chain monitor

Support VESA DSC 1.2b

Support HDCP

Support up to 36 BPP (Bit Pre Pixel)

##### HDMI

Supports HDMI 2.1 features

Supports up to 6Gbps TMDS link rates on 3 lanes

Supports up to 12Gbps FRL link rates on 4 lanes

Supports HDCP 2.3

Supports audio over HDMI

Support up to 36 BBP (Bit Pre Pixel)

##### VGA (optional)

VGA output

##### USB-C® DP Alt Mode (optional)

DisplayPort™ over the optional USB-C® module

##### Memory

The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

##### Graphics/Video API Support

HEVC/VP9 8k@60 12-bit 420/422/444 Decode

AV1 8K@60 10-bit 420 Decode

AVC 4k@60 8bit 430 Decode

HDR

/Dircet3D 12.2//Dircet3D 12 .1/Dircet3D 12/Dircet3D 11.4

Dircet3D 11.3/ Direct3D 11.2/Direct/Direct3D11.1/Dircet3D 10,1/ Direct3D 10

Dircet3D 9.0L/Dircet3D 9.0C/ Direct2D

OpenGL\* 4.6

OpenCL\* 3.0/OpenCL\*2.1/OpenCL2.0/Open CL 1.2

Direct X\* 12.2

##### Max resolution (Native DP)

DP2.1 (HBR3) 7680 x 4320 @60hz (with DSC)

##### Max resolution (Native HDMI)

4096 x 2160 @60Hz HDMI 2.1 (TMDS 6Gbps) 4K @60HZ 24bpp

##### Max resolution

DP ALT Mode DP2.1 UHBR20 7680 x 4320 @60Hz

##### (Native Thunderbolt 4)

##### Max resolution (option VGA)

2048 x 1536 @60Hz

##### Max resolution (option DP)

UHBR20: 8K @60Hz compressed, 5K @120Hz compressed

##### Max resolution (option HDMI)

HDMI2.1 (FRL 12G bps) 8K60Hz Compressed, 5K @120Hz compressed, 4K @144Hz compressed

##### Max resolution

DP ALT Mode DP2.1 UHBR20 7680 x 4320 @60Hz

##### (optional Thunderbolt 4)

### Technical Specifications – Graphics

#### **NVIDIA® GeForce® RTX 5050 8GB GDDR7 Graphics card**

##### **DisplayPort™**

Supports up to UHBR20

Support MST (Multi-Stream Transport), Maximum of 3 displays with Daisy-Chain monitor

Support VESA DSC 1.2a

Maximum resolution with CVT-RB timing: 8K@240Hz (With DSC)

16K@60Hz (With DSC)

Maximum line width per head with DSC is 5120 pixels

4:4:4 (RGB or YUV) pixel format at 8,10, or 12 bpp is support

4:2:2 and 4:2:0 pixel formats are not supported.

##### **HDMI**

Supports HDMI 2.1b features

TMDS mode :

Maximum pixel clock :

4:4:4 or 4:2:2 pixel format:600MHz

4:2:0 pixel format :1200MHz

Maximum resolution: 4096x2160x24 bpp @60Hz

FRL mode :

Maximum pixel clock:2069MHz

Maximum resolution:

6780 x4320 x36 bpp YUV420 or DSC @60Hz

### Technical Specifications – Storage

#### STORAGE

**NOTE:** Starting November 1, 2023, HP PCs with Windows require Windows to be installed on SSD. HDD can only be configured as additional data drives and not as the boot drive.

##### 256GB M.2 2280 PCIe NVMe SSD

|                          |                     |
|--------------------------|---------------------|
| Capacity                 | 256GB               |
| Interface                | PCIe Gen4x4         |
| Minimum Sequential Read  | 3100 MB/s $\pm$ 20% |
| Minimum Sequential Write | 1200 MB/s $\pm$ 20% |
| Logical Blocks           | 500,118,192         |
| Features                 | TRIM; L1.2          |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

##### 512GB M.2 2280 PCIe NVMe SSD

|                          |                     |
|--------------------------|---------------------|
| Capacity                 | 512GB               |
| Interface                | PCIe Gen4x4         |
| Minimum Sequential Read  | 3500 MB/s $\pm$ 20% |
| Minimum Sequential Write | 1600 MB/s $\pm$ 20% |
| Logical Blocks           | 1,000,215,216       |
| Features                 | TRIM; L1.2          |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

##### 1TB M.2 2280 PCIe NVMe SSD

|                          |                     |
|--------------------------|---------------------|
| Capacity                 | 1TB                 |
| Interface                | PCIe Gen4x4         |
| Minimum Sequential Read  | 3500 MB/s $\pm$ 20% |
| Minimum Sequential Write | 2700 MB/s $\pm$ 20% |
| Logical Blocks           | 2,000,409,264       |
| Features                 | TRIM; L1.2          |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

##### 1TB M.2 2280 PCIe 5x4 NVMe Three Layer Cell SSD

|                          |                                                                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 1TB                                                                                                                                           |
| Interface                | PCIe Gen5x4                                                                                                                                   |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 13000 MB/s $\pm$ 20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s $\pm$ 20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 9000 MB/s $\pm$ 20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s $\pm$ 20% (in PCIe 4x4 slot)  |
| Logical Blocks           | 2,000,409,264                                                                                                                                 |
| Features                 | TRIM; L1.2; Pyrite 2.0                                                                                                                        |

Technical Specifications – Storage

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

2 TB PCIe® Gen5x4 NVMe™ SSD

|                          |                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 2TB                                                                                                                                 |
| Interface                | PCIe Gen5x4                                                                                                                         |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 13500 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 10000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Logical Blocks           | 4,000,797,360                                                                                                                       |
| Features                 | TRIM; L1.2; Pyrite 2.0                                                                                                              |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

512 GB PCIe Gen5 NVMe™ Value 2280 Solid State Drive

|                          |                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 512GB                                                                                                                              |
| Interface                | PCIe Gen5                                                                                                                          |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 9000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 6000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 6000 MB/s ±20% (in PCIe 4x4 slot) |
| Logical Blocks           | 1,000,215,216                                                                                                                      |
| Features                 | TRIM; L1.2; Pyrite 2.0                                                                                                             |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

1 TB PCIe Gen5 NVMe™ Value 2280 Solid State Drive

|                          |                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 1TB                                                                                                                                |
| Interface                | PCIe Gen5                                                                                                                          |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 9500 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 7000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 6600 MB/s ±20% (in PCIe 4x4 slot) |
| Logical Blocks           | 2,000,409,264                                                                                                                      |
| Features                 | TRIM; L1.2; Pyrite 2.0                                                                                                             |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

### Technical Specifications – Storage

#### 512 GB PCIe Gen5 NVMe™ Value 2280 Solid State Drive

|                                 |                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Capacity</b>                 | 512GB                                                                                                                              |
| <b>Interface</b>                | PCIe Gen5x4                                                                                                                        |
| <b>Minimum Sequential Read</b>  | 1 <sup>st</sup> SSD: 9000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| <b>Minimum Sequential Write</b> | 1 <sup>st</sup> SSD: 6000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 6000 MB/s ±20% (in PCIe 4x4 slot) |
| <b>Logical Blocks</b>           | 1,000,215,216                                                                                                                      |
| <b>Features</b>                 | TRIM; L1.2; Pyrite 2.0                                                                                                             |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

#### 1 TB PCIe Gen5 NVMe™ Value 2280 Solid State Drive

|                                 |     |
|---------------------------------|-----|
| <b>Capacity</b>                 | 1TB |
| <b>Interface</b>                |     |
| <b>Minimum Sequential Read</b>  |     |
| <b>Minimum Sequential Write</b> |     |
| <b>Logical Blocks</b>           |     |
| <b>Features</b>                 |     |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

#### 2TB PCIe Gen5 2280 NVMe Value Solid State Drive

|                                 |                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>Capacity</b>                 | 2TB                                                                                                                                 |
| <b>Interface</b>                | PCIe Gen5                                                                                                                           |
| <b>Minimum Sequential Read</b>  | 1 <sup>st</sup> SSD: 10000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| <b>Minimum Sequential Write</b> | 1 <sup>st</sup> SSD: 8000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 6800 MB/s ±20% (in PCIe 4x4 slot)  |
| <b>Logical Blocks</b>           | 4,000,797,360                                                                                                                       |
| <b>Features</b>                 | TRIM; L1.2; Pyrite 2.0                                                                                                              |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

#### 256GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Value SSD

|                                 |                          |
|---------------------------------|--------------------------|
| <b>Capacity</b>                 | 256GB                    |
| <b>Interface</b>                | PCIe NVMe Gen4x4         |
| <b>Minimum Sequential Read</b>  | 3100 MB/s ±20%           |
| <b>Minimum Sequential Write</b> | 1200 MB/s ±20%           |
| <b>Logical Blocks</b>           | 500,118,192              |
| <b>Features</b>                 | TRIM; L1.2; TCG Opal 2.0 |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

Technical Specifications – Storage

512 GB PCIe Gen5 NVMe™ Value 2280 Self Encrypted OPAL2 Solid State Drive

|                          |                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 512GB                                                                                                                              |
| Interface                | PCIe Gen5                                                                                                                          |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 9000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 6000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 6000 MB/s ±20% (in PCIe 4x4 slot) |
| Logical Blocks           | 1,000,215,216                                                                                                                      |
| Features                 | TRIM; L1.2; TCG Opal 2.0                                                                                                           |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

1 TB PCIe® Gen5x4 NVMe™ Self Encrypted OPAL2 SSD

|                          |                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 1TB                                                                                                                                 |
| Interface                | PCIe Gen5                                                                                                                           |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 13000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 9000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot)  |
| Logical Blocks           | 2,000,409,264                                                                                                                       |
| Features                 | TRIM; L1.2; TCG Opal 2.0                                                                                                            |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

2 TB PCIe® Gen5x4 NVMe™ Self Encrypted OPAL2 SSD

|                          |                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | 2TB                                                                                                                                 |
| Interface                | PCIe Gen5                                                                                                                           |
| Minimum Sequential Read  | 1 <sup>st</sup> SSD: 13500 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Minimum Sequential Write | 1 <sup>st</sup> SSD: 10000 MB/s ±20% (in PCIe 5x4 slot)<br>2 <sup>nd</sup> / 3 <sup>rd</sup> SSD: 7000 MB/s ±20% (in PCIe 4x4 slot) |
| Logical Blocks           | 4,000,797,360                                                                                                                       |
| Features                 | TRIM; L1.2; TCG Opal 2.0                                                                                                            |

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

#### NETWORKING AND COMMUNICATIONS

| Intel® I219-LM 1 Gigabit Network Connection LOM (vPro) |                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Connector</b>                                       | RJ-45                                                                                                                                                                                                                                                                                                                                                                |
| <b>System Interface</b>                                | PCI (Intel proprietary) + SMBus                                                                                                                                                                                                                                                                                                                                      |
| <b>Data rates supported</b>                            | 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)<br>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)<br>1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40)<br>Auto-Negotiation (Automatic Speed Selection)<br>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s      |
| <b>IEEE Compliance</b>                                 | IEEE 802.1p QoS (Quality of Service) Support<br>IEEE 802.1q VLAN support<br>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)<br>IEEE 802.3az EEE (Energy Efficient Ethernet)                                                                                                                                                                        |
| <b>Performance</b>                                     | TCP/IP/UDP Checksum Offload (configurable)<br>Protocol Offload (ARP & NS)<br>Large send offload and Giant send offload<br>Receiving Side Scaling (Hash Mode Only)<br>Jumbo Frame 9K                                                                                                                                                                                  |
| <b>Power consumption</b>                               | Cable Disconnection: 25mW<br>100Mbps Full Run: 450mW<br>1000bp Full Run: 1000mW<br>WoL Enable(S3/S4/S5): 50mW<br>WoL Disable(S3/S4/S5): 25mW                                                                                                                                                                                                                         |
| <b>Power Management</b>                                | ACPI compliant – multiple power modes<br>Situation-sensitive features reduce power consumption<br>Advanced link down power saving for reducing link down power consumption                                                                                                                                                                                           |
| <b>Management Interface</b>                            | Auto MDI/MDIX Crossover cable detection                                                                                                                                                                                                                                                                                                                              |
| <b>IT Manageability</b>                                | Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)<br>PXE 2.1 Remote Boot<br>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))<br>Comprehensive diagnostic and configuration software suite<br>Virtual Cable Doctor for Ethernet cable status |
| <b>Security &amp; Manageability</b>                    | Intel® vPro™ support with appropriate Intel® chipset components                                                                                                                                                                                                                                                                                                      |

| Intel I226-T1 2.5GbE Ethernet Network Adapter |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Connector</b>                              | RJ-45                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>System Interface</b>                       | PCI (Intel proprietary) + SMBus                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Data rates supported</b>                   | 1. 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)<br>2. 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)<br>3. 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40)<br>4. 2.5 Gbit/s operation( 2.5GBASE-T; IEEE 802.3bz Clause 126)<br>5. Auto-Negotiation (Automatic Speed Selection)<br>Full Duplex Operation at all Speeds, Half Duplex operation at 10 & 100 Mbit/s |

### Technical Specifications – Networking and Communications

|                             |                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IEEE Compliance</b>      | IEEE 802.1p QoS (Quality of Service) Support<br>IEEE 802.1q VLAN support<br>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)<br>IEEE 802.3az EEE (Energy Efficient Ethernet)<br>IEEE 802.3i 10BASE-T<br>IEEE 802.3u 100BASE-TX<br>IEEE 802.3ab 1000BASE-T<br>IEEE 802.3bz 2.5GBASE-T                                                                |
| <b>Performance</b>          | TCP/IP/UDP Checksum Offload (configurable)<br>Protocol Offload (ARP & NS)<br>Large send offload and Giant send offload<br>Receiving Side Scaling (Hash Mode Only)<br>Jumbo Frame 9K                                                                                                                                                                                  |
| <b>Power consumption</b>    | Cable Disconnection: 25mW<br>100Mbps Full Run: 450mW<br>1000Mbps Full Run: 1000mW<br>2500Mbps Full Run: 4500mW<br>WoL Enable(S3/S4/S5): 50mW<br>WoL Disable(S3/S4/S5): 25mW                                                                                                                                                                                          |
| <b>Power Management</b>     | ACPI compliant – multiple power modes<br>Situation-sensitive features reduce power consumption<br>Advanced link down power saving for reducing link down power consumption                                                                                                                                                                                           |
| <b>Management Interface</b> | Auto MDI/MDIX Crossover cable detection                                                                                                                                                                                                                                                                                                                              |
| <b>IT Manageability</b>     | Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)<br>PXE 2.1 Remote Boot<br>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))<br>Comprehensive diagnostic and configuration software suite<br>Virtual Cable Doctor for Ethernet cable status |

| <b>Intel® I226-V 2.5 Gigabit Network Connection LOM (non-vPro)</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Connector</b>                                                   | RJ-45                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>System Interface</b>                                            | PCI (Intel proprietary) + SMBus                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Data rates supported</b>                                        | 1. 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)<br>2. 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)<br>3. 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40)<br>4. 2.5 Gbit/s operation (2.5GBASE-T; IEEE 802.3bz Clause 126)<br>5. Auto-Negotiation (Automatic Speed Selection)<br>Full Duplex Operation at all Speeds, Half Duplex operation at 10& 100 Mbit/s |
| <b>IEEE Compliance</b>                                             | IEEE 802.1p QoS (Quality of Service) Support<br>IEEE 802.1q VLAN support<br>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)<br>IEEE 802.3az EEE (Energy Efficient Ethernet)<br>IEEE 802.3i 10BASE-T<br>IEEE 802.3u 100BASE-TX<br>IEEE 802.3ab 1000BASE-T<br>IEEE 802.3bz 2.5GBASE-T                                                                                                                                     |
| <b>Performance</b>                                                 | TCP/IP/UDP Checksum Offload (configurable)<br>Protocol Offload (ARP & NS)<br>Large send offload and Giant send offload<br>Receiving Side Scaling (Hash Mode Only)<br>Jumbo Frame 9K                                                                                                                                                                                                                                                       |

### Technical Specifications – Networking and Communications

|                                     |                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power consumption</b>            | Cable Disconnection: 25mW<br>100Mbps Full Run: 450mW<br>1000Mbps Full Run: 1000mW<br>2500Mbps Full Run: 4500mW<br>WoL Enable(S3/S4/S5): 50mW<br>WoL Disable(S3/S4/S5): 25mW                                                                                                                                                                                          |
| <b>Power Management</b>             | ACPI compliant – multiple power modes<br>Situation-sensitive features reduce power consumption<br>Advanced link down power saving for reducing link down power consumption                                                                                                                                                                                           |
| <b>Management Interface</b>         | Auto MDI/MDIX Crossover cable detection                                                                                                                                                                                                                                                                                                                              |
| <b>IT Manageability</b>             | Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)<br>PXE 2.1 Remote Boot<br>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))<br>Comprehensive diagnostic and configuration software suite<br>Virtual Cable Doctor for Ethernet cable status |
| <b>Security &amp; Manageability</b> | Intel® non-vPro™ support with appropriate Intel® chipset components                                                                                                                                                                                                                                                                                                  |

| <b>Intel BE211 Wi-Fi 7 +Bluetooth® 6.0 World-wide WLAN vPro<sup>1</sup></b> |                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wireless LAN Standards</b>                                               | IEEE 802.11a<br>IEEE 802.11b<br>IEEE 802.11g<br>IEEE 802.11n<br>IEEE 802.11ac<br>IEEE 802.11ax<br>IEEE 802.11be<br>IEEE 802.11d<br>IEEE 802.11e<br>IEEE 802.11h<br>IEEE 802.11i<br>IEEE 802.11k<br>IEEE 802.11r<br>IEEE 802.11v                                                   |
| <b>Interoperability</b>                                                     | Wi-Fi certified                                                                                                                                                                                                                                                                   |
| <b>Frequency Band</b>                                                       | 802.11b/g/n/ax/be<br>• 2.402 – 2.482 GHz<br><br>802.11a/n/ac/ax/be<br>• 4.9 – 4.95 GHz (Japan)<br>• 5.15 – 5.25 GHz<br>• 5.25 – 5.35 GHz<br>• 5.47 – 5.725 GHz<br>• 5.825 – 5.850 GHz<br>• 5.955 – 6.415 GHz<br>• 6.435 – 6.515 GHz<br>• 6.535 – 6.875 GHz<br>• 6.895 – 7.115 GHz |

### Technical Specifications – Networking and Communications

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Data Rates</b>                  | <ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: max 300Mbps</li> <li>• 802.11ac: 1733Mbps</li> <li>• 802.11ax: max 2.4Gbps</li> <li>• 802.11be: max 5.76Gbps</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Modulation</b>                  | Direct Sequence Spread Spectrum<br>OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM, 4096QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Security<sup>2</sup></b>        | <ul style="list-style-type: none"> <li>• WPA3 personal and enterprise including WPA2 transition mode.</li> <li>• 802.1X EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0 -MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA')</li> <li>• 128-bit AES-CCMP, 256-bit AES-GCMP</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Network Architecture Models</b> | Ad-hoc (Peer to Peer)<br>Infrastructure (Access Point Required)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Roaming</b>                     | IEEE 802.11 compliant roaming between access points                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Power<sup>3</sup></b>    | <ul style="list-style-type: none"> <li>• 802.11b, 1Mbps : +17dBm minimum</li> <li>• 802.11g, 6Mbps : +16dBm minimum</li> <li>• 802.11a, 6Mbps : +17dBm minimum</li> <li>• 802.11n, MCS7(HT20) : +14dBm minimum</li> <li>• 802.11n, MCS7(HT40) : +13.5dBm minimum</li> <li>• 802.11ac MCS9(VHT20) : 13.5dBm minimum</li> <li>• 802.11ac MCS9(VHT40) : +13.5dBm minimum</li> <li>• 802.11ac MCS9(VHT80) : +12.5dBm minimum</li> <li>• 802.11ac MCS9(VHT160) : +10.5dBm minimum</li> <li>• 802.11ax MCS11(HE20)(6GHz) : +11.5dBm minimum</li> <li>• 802.11ax MCS11(HE40)(6GHz) : +7.5dBm minimum</li> <li>• 802.11ax MCS11(HE80)(6GHz) : +7.5dBm minimum</li> <li>• 802.11ax MCS11(HE160)(6GHz) : +7.5dBm minimum</li> <li>• 802.11be MCS13(EHT20)(6GHz) : +4dBm minimum</li> <li>• 802.11be MCS13(EHT40)(6GHz) : +7dBm minimum</li> <li>• 802.11be MCS13(EHT80)(6GHz) : +10dBm minimum</li> <li>• 802.11be MCS13(EHT160)(6GHz) : +13dBm minimum</li> <li>• 802.11be MCS13(EHT320)(6GHz) : +16dBm minimum</li> </ul> |
| <b>Power Consumption</b>           | <ul style="list-style-type: none"> <li>• Transmit mode 3.1 W</li> <li>• Receive mode 1.8 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode 50 mW (WLAN unassociated)</li> <li>• Connected Standby 10mW</li> <li>• Radio disabled 8 mW</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Power Management</b>            | ACPI and PCI Express compliant power management<br>802.11 compliant power saving mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

### Technical Specifications – Networking and Communications

|                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Receiver Sensitivity<sup>4</sup></b>                                                                  | <ul style="list-style-type: none"> <li>•802.11b, 1Mbps: -93.5dBm maximum</li> <li>•802.11b, 11Mbps: -85dBm maximum</li> <li>•802.11a/g, 6Mbps: -90.5dBm maximum</li> <li>•802.11a/g, 54Mbps: -72.5dBm maximum</li> <li>•802.11n, MCS0(HT20): -90dBm maximum</li> <li>•802.11n, MCS7(HT20): -71.5dBm maximum</li> <li>•802.11n, MCS0(HT40): -88.5dBm maximum</li> <li>•802.11n, MCS7(HT40): -68.5dBm maximum</li> <li>•802.11ac, MCS9(VHT20): -88.5dBm maximum</li> <li>•802.11ac, MCS9(VHT40): -65.5dBm maximum</li> <li>•802.11ac, MCS9(VHT80): -60.5dBm maximum</li> <li>•802.11ac, MCS9(VHT160): -58.5dBm maximum</li> <li>•802.11ax, MCS11(HE20)(6GHz): -59.5dBm maximum</li> <li>•802.11ax, MCS11(HE40)(6GHz): -56.5dBm maximum</li> <li>•802.11ax, MCS11(HE80)(6GHz): -53.5dBm maximum</li> <li>•802.11ax, MCS11(HE160)(6GHz): -51.5dBm maximum</li> <li>•802.11be, MCS13(EHT20)(6GHz): -55.5dBm maximum</li> <li>•802.11be, MCS13(EHT40)(6GHz): -53.5dBm maximum</li> <li>•802.11be, MCS13(EHT80)(6GHz): -51.5dBm maximum</li> <li>•802.11be, MCS13(EHT160)(6GHz): -48.5dBm maximum</li> <li>•802.11be, MCS13(EHT320)(6GHz): -45.5dBm maximum</li> </ul> |
| <b>Antenna type</b>                                                                                      | High efficiency antenna with spatial diversity<br>Two embedded tri-band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Form Factor</b>                                                                                       | PCI-Express M.2 MiniCard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Dimensions</b>                                                                                        | 1. Type 2230: 2.3 x 22.0 x 30.0 mm<br>2. Type 1216: 1.67 x 12.0 x 16.0 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Weight</b>                                                                                            | 1. Type 2230: 2.8g<br>2. Type 1216: 1.3g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Operating Voltage</b>                                                                                 | 3.3v +/- 9%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Temperature</b>                                                                                       | Operating: 14° to 158° F (–10° to 70° C)<br>Non-operating: –40° to 158° F (–40° to 70° C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Humidity</b>                                                                                          | Operating: 50% to 90% (non-condensing)<br>Non-operating: 50% to 90% (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Altitude</b>                                                                                          | Operating: 0 to 10,000 ft (3,048 m)<br>Non-operating: 0 to 50,000 ft (15,240 m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>LED Activity</b>                                                                                      | LED Amber – Radio OFF; LED OFF – Radio ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Technology</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Bluetooth® Specification</b>                                                                          | 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Compliant                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Frequency Band</b>                                                                                    | 2402 to 2480 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Number of Available Channels</b>                                                                      | Legacy: 0~79 (1 MHz/CH)<br>BLE: 0~39 (2 MHz/CH)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Data Rates and Throughput</b>                                                                         | Bluetooth 4.x : 1Mbps (LE); 3Mbps (EDR)<br>Bluetooth 5.x : 2Mbps (LE); 3Mbps (EDR)<br>Bluetooth 6.0 : 2Mbps (LE); 3Mbps (EDR)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

### Technical Specifications – Networking and Communications

|                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Transmit Power</b>                              | The Bluetooth component shall operate as a Class I Bluetooth device with a maximum transmit power of +15.5 dBm for BR and +13dBm for EDR.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Power Consumption</b>                           | Peak (Tx): 330 mW<br>Peak (Rx): 230 mW<br>Selective Suspend: 17 mW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Bluetooth® Software Supported Link Topology</b> | Microsoft Windows Bluetooth Software                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Power Management</b>                            | ACPI and PCI Express compliant power management<br>802.11 compliant power saving mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Certifications</b>                              | FCC (47 CFR) Part 15C/E, Section 15.247, 15.249, 15.407<br>ETSI 300 328, ETSI 301 893, ETSI 303 687                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Bluetooth® Profiles Supported</b>               | Bluetooth 4.1-ESR 5/6/7 Compliance<br>LE Link Layer Ping<br>LE Dual Mode<br>LE Link Layer<br>LE Low Duty Cycle Directed Advertising<br>LE L2CAP Connection Oriented Channels<br>Train Nudging & Interlaced Scan<br>Bluetooth 4.2 ESR08 Compliance<br>LE Secure Connection- Basic/Full<br>LE Privacy 1.2 –Link Layer Privacy<br>LE Privacy 1.2 –Extended Scanner Filter Policies<br>LE Data Packet Length Extension<br>FAX Profile (FAX)<br>Basic Imaging Profile (BIP)2<br>Headset Profile (HSP)<br>Hands Free Profile (HFP)<br>Advanced Audio Distribution Profile (A2DP)<br>Bluetooth 5.2<br>ESR9/10 Compliance<br>LE Advertisement Extensions<br>Channel Selection Algo<br>Limited High Duty Cycle Non-Connectable Advertising<br>2Mbps LE<br>LE Long Range<br>Bluetooth 5.3<br>Host to Controller Encryption Key Control Enhancements<br>Compliance to the latest Errata Section 12.3 of Bluetooth 5.3 specification<br>Periodic Advertisement interval |

1. Wi-Fi 7 requires a Wi-Fi 7 router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 7 is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 7 is supported. Wi-Fi 7 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.
2. Check latest software/driver release for updates on supported security features.
3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### Technical Specifications – Networking and Communications

| <b>Intel BE211 Wi-Fi 7 +Bluetooth® 6.0 World-wide WLAN non-vPro<sup>1</sup></b> |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wireless LAN Standards</b>                                                   | IEEE 802.11a<br>IEEE 802.11b<br>IEEE 802.11g<br>IEEE 802.11n<br>IEEE 802.11ac<br>IEEE 802.11ax<br>IEEE 802.11be<br>IEEE 802.11d<br>IEEE 802.11e<br>IEEE 802.11h<br>IEEE 802.11i<br>IEEE 802.11k<br>IEEE 802.11r<br>IEEE 802.11v                                                                                                                                                                                          |
| <b>Interoperability</b>                                                         | Wi-Fi certified                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Frequency Band</b>                                                           | 802.11b/g/n/ax/be <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> 802.11a/n/ac/ax/be <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)</li> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> <li>• 5.955 – 6.415 GHz</li> <li>• 6.435 – 6.515 GHz</li> <li>• 6.535 – 6.875 GHz</li> <li>• 6.895 – 7.115 GHz</li> </ul> |
| <b>Data Rates</b>                                                               | <ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: max 300Mbps</li> <li>• 802.11ac: 1733Mbps</li> <li>• 802.11ax: max 2.4Gbps</li> <li>• 802.11be: max 5.76Gbps</li> </ul>                                                                                             |
| <b>Modulation</b>                                                               | Direct Sequence Spread Spectrum<br>OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM, 4096QAM                                                                                                                                                                                                                                                                                                                      |
| <b>Security<sup>2</sup></b>                                                     | <ul style="list-style-type: none"> <li>• WPA3 personal and enterprise including WPA2 transition mode.</li> <li>• 802.1X EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0 -MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA')</li> <li>• 128-bit AES-CCMP, 256-bit AES-GCMP</li> </ul>                                                                                                                                                               |
| <b>Network Architecture Models</b>                                              | Ad-hoc (Peer to Peer)<br>Infrastructure (Access Point Required)                                                                                                                                                                                                                                                                                                                                                          |
| <b>Roaming</b>                                                                  | IEEE 802.11 compliant roaming between access points                                                                                                                                                                                                                                                                                                                                                                      |

### Technical Specifications – Networking and Communications

|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output Power<sup>3</sup></b>         | <ul style="list-style-type: none"> <li>• 802.11b, 1Mbps : +17dBm minimum</li> <li>• 802.11g, 6Mbps : +16dBm minimum</li> <li>• 802.11a, 6Mbps : +17dBm minimum</li> <li>• 802.11n, MCS7(HT20) : +14dBm minimum</li> <li>• 802.11n, MCS7(HT40) : +13.5dBm minimum</li> <li>• 802.11ac MCS9(VHT20) : 13.5dBm minimum</li> <li>• 802.11ac MCS9(VHT40) : +13.5dBm minimum</li> <li>• 802.11ac MCS9(VHT80) : +12.5dBm minimum</li> <li>• 802.11ac MCS9(VHT160) : +10.5dBm minimum</li> <li>• 802.11ax MCS11(HE20)(6GHz) : +11.5dBm minimum</li> <li>• 802.11ax MCS11(HE40)(6GHz) : +7.5dBm minimum</li> <li>• 802.11ax MCS11(HE80)(6GHz) : +7.5dBm minimum</li> <li>• 802.11ax MCS11(HE160)(6GHz) : +7.5dBm minimum</li> <li>• 802.11be MCS13(EHT20)(6GHz) : +4dBm minimum</li> <li>• 802.11be MCS13(EHT40)(6GHz) : +7dBm minimum</li> <li>• 802.11be MCS13(EHT80)(6GHz) : +10dBm minimum</li> <li>• 802.11be MCS13(EHT160)(6GHz) : +13dBm minimum</li> <li>• 802.11be MCS13(EHT320)(6GHz) : +16dBm minimum</li> </ul>                                                                                                                                                                    |
| <b>Power Consumption</b>                | <ul style="list-style-type: none"> <li>• Transmit mode 3.1 W</li> <li>• Receive mode 1.8 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode 50 mW (WLAN unassociated)</li> <li>• Connected Standby 10mW</li> <li>• Radio disabled 8 mW</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Power Management</b>                 | ACPI and PCI Express compliant power management<br>802.11 compliant power saving mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Receiver Sensitivity<sup>4</sup></b> | <ul style="list-style-type: none"> <li>• 802.11b, 1Mbps: -93.5dBm maximum</li> <li>• 802.11b, 11Mbps: -85dBm maximum</li> <li>• 802.11a/g, 6Mbps: -90.5dBm maximum</li> <li>• 802.11a/g, 54Mbps: -72.5dBm maximum</li> <li>• 802.11n, MCS0(HT20): -90dBm maximum</li> <li>• 802.11n, MCS7(HT20): -71.5dBm maximum</li> <li>• 802.11n, MCS0(HT40): -88.5dBm maximum</li> <li>• 802.11n, MCS7(HT40): -68.5dBm maximum</li> <li>• 802.11ac, MCS9(VHT20): -88.5dBm maximum</li> <li>• 802.11ac, MCS9(VHT40): -65.5dBm maximum</li> <li>• 802.11ac, MCS9(VHT80): -60.5dBm maximum</li> <li>• 802.11ac, MCS9(VHT160): -58.5dBm maximum</li> <li>• 802.11ax, MCS11(HE20)(6GHz): -59.5dBm maximum</li> <li>• 802.11ax, MCS11(HE40)(6GHz): -56.5dBm maximum</li> <li>• 802.11ax, MCS11(HE80)(6GHz): -53.5dBm maximum</li> <li>• 802.11ax, MCS11(HE160)(6GHz): -51.5dBm maximum</li> <li>• 802.11be, MCS13(EHT20)(6GHz): -55.5dBm maximum</li> <li>• 802.11be, MCS13(EHT40)(6GHz): -53.5dBm maximum</li> <li>• 802.11be, MCS13(EHT80)(6GHz): -51.5dBm maximum</li> <li>• 802.11be, MCS13(EHT160)(6GHz): -48.5dBm maximum</li> <li>• 802.11be, MCS13(EHT320)(6GHz): -45.5dBm maximum</li> </ul> |
| <b>Antenna type</b>                     | High efficiency antenna with spatial diversity<br>Two embedded tri-band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Form Factor</b>                      | PCI-Express M.2 MiniCard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

### Technical Specifications – Networking and Communications

|                                                                                                          |                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimensions</b>                                                                                        | 1. Type 2230: 2.3 x 22.0 x 30.0 mm<br>2. Type 1216: 1.67 x 12.0 x 16.0 mm                                                                 |
| <b>Weight</b>                                                                                            | 1. Type 2230: 2.8g<br>2. Type 1216: 1.3g                                                                                                  |
| <b>Operating Voltage</b>                                                                                 | 3.3v +/- 9%                                                                                                                               |
| <b>Temperature</b>                                                                                       | Operating: 14° to 158° F (–10° to 70° C)<br>Non-operating: –40° to 158° F (–40° to 70° C)                                                 |
| <b>Humidity</b>                                                                                          | Operating: 50% to 90% (non-condensing)<br>Non-operating: 50% to 90% (non-condensing)                                                      |
| <b>Altitude</b>                                                                                          | Operating: 0 to 10,000 ft (3,048 m)<br>Non-operating: 0 to 50,000 ft (15,240 m)                                                           |
| <b>LED Activity</b>                                                                                      | LED Amber – Radio OFF; LED OFF – Radio ON                                                                                                 |
| <b>HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Technology</b> |                                                                                                                                           |
| <b>Bluetooth® Specification</b>                                                                          | 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Compliant                                                                               |
| <b>Frequency Band</b>                                                                                    | 2402 to 2480 MHz                                                                                                                          |
| <b>Number of Available Channels</b>                                                                      | Legacy: 0~79 (1 MHz/CH)<br>BLE: 0~39 (2 MHz/CH)                                                                                           |
| <b>Data Rates and Throughput</b>                                                                         | Bluetooth 4.x : 1Mbps (LE); 3Mbps (EDR)<br>Bluetooth 5.x : 2Mbps (LE); 3Mbps (EDR)<br>Bluetooth 6.0 : 2Mbps (LE); 3Mbps (EDR)             |
| <b>Transmit Power</b>                                                                                    | The Bluetooth component shall operate as a Class I Bluetooth device with a maximum transmit power of +15.5 dBm for BR and +13dBm for EDR. |
| <b>Power Consumption</b>                                                                                 | Peak (Tx): 330 mW<br>Peak (Rx): 230 mW<br>Selective Suspend: 17 mW                                                                        |
| <b>Bluetooth® Software Supported Link Topology</b>                                                       | 1. Microsoft Windows Bluetooth Software                                                                                                   |
| <b>Power Management</b>                                                                                  | ACPI and PCI Express compliant power management<br>802.11 compliant power saving mode                                                     |
| <b>Certifications</b>                                                                                    | FCC (47 CFR) Part 15C/E, Section 15.247, 15.249, 15.407<br>ETSI 300 328, ETSI 301 893, ETSI 303 687                                       |

### Technical Specifications – Networking and Communications

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bluetooth® Profiles Supported</b> | Bluetooth 4.1-ESR 5/6/7 Compliance<br>LE Link Layer Ping<br>LE Dual Mode<br>LE Link Layer<br>LE Low Duty Cycle Directed Advertising<br>LE L2CAP Connection Oriented Channels<br>LE Nudging & Interlaced Scan<br>Bluetooth 4.2 ESR08 Compliance<br>E Secure Connection- Basic/Full<br>E Privacy 1.2 –Link Layer Privacy<br>LE Privacy 1.2 –Extended Scanner Filter Policies<br>LE Data Packet Length Extension<br>FAX Profile (FAX)<br>Basic Imaging Profile (BIP)2<br>Headset Profile (HSP)<br>Hands Free Profile (HFP)<br>Advanced Audio Distribution Profile (A2DP)<br>Bluetooth 5.2<br>ESR9/10 Compliance<br>LE Advertisement Extensions<br>Channel Selection Algo<br>Limited High Duty Cycle Non-Connectable Advertising<br>Mbps LE<br>LE Long Range<br>Bluetooth 5.3<br>Host to Controller Encryption Key Control Enhancements<br>Compliance to the latest Errata Section 12.3 of Bluetooth 5.3 specification<br><br>Periodic Advertisement interval |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

1. Wi-Fi 7 requires a Wi-Fi 7 router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 7 is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 7 is supported. Wi-Fi 7 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.
2. Check latest software/driver release for updates on supported security features.
3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### Technical Specifications – Networking and Communications

| <b>Realtek RTL8852CE 802.11ax 2x2 Wi-Fi 6E + Bluetooth® 5.3 Wireless Card<sup>1</sup></b><br>(802.11ax 2x2, supporting gigabit data rate) |                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wireless LAN Standards</b>                                                                                                             | IEEE 802.11a<br>IEEE 802.11b<br>IEEE 802.11g<br>IEEE 802.11n<br>IEEE 802.11ac<br>IEEE 802.11ax<br>IEEE 802.11d<br>IEEE 802.11e<br>IEEE 802.11h<br>IEEE 802.11i<br>IEEE 802.11k                                                                                                                          |
| <b>Interoperability</b>                                                                                                                   | Wi-Fi certified                                                                                                                                                                                                                                                                                         |
| <b>Frequency Band</b>                                                                                                                     | 802.11b/g/n/ax<br>• 2.402 – 2.482 GHz<br><br>802.11a/n/ac/ax<br>• 5.15 – 5.25 GHz<br>• 5.25 – 5.35 GHz<br>• 5.47 – 5.725 GHz<br>• 5.825 – 5.850 GHz<br>• 5.955 – 6.415 GHz<br>• 6.435 – 6.515 GHz<br>• 6.535 – 6.875 GHz<br>• 6.895 – 7.115 GHz                                                         |
| <b>Data Rates</b>                                                                                                                         | • 802.11b: 1, 2, 5.5, 11 Mbps<br>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps<br>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps<br>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)<br>• 802.11ac: MCS0 ~ MCS9, (20MHz, 40MHz, ,80MHz & 160MHz)<br>• 802.11ax: MCS0 ~ MCS11, (20MHz, 40MHz, ,80MHz & 160MHz) |
| <b>Modulation</b>                                                                                                                         | Direct Sequence Spread Spectrum<br>OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM                                                                                                                                                                                                              |
| <b>Security<sup>2</sup></b>                                                                                                               | • IEEE and WiFi certified 64 / 128 bit WEP encryption for a/b/g mode only<br>• AES-CCMP: 128 bit in hardware<br>• 802.1x authentication<br>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.<br>• WPA2 certification<br>• WPA3 (personal) certification<br>• IEEE 802.11i<br>• WAPI<br>• EAP       |
| <b>Network Architecture Models</b>                                                                                                        | Ad-hoc (Peer to Peer)<br>Infrastructure (Access Point Required)                                                                                                                                                                                                                                         |
| <b>Roaming</b>                                                                                                                            | IEEE 802.11 compliant roaming between access points                                                                                                                                                                                                                                                     |

### Technical Specifications – Networking and Communications

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output Power<sup>3</sup></b> | <ul style="list-style-type: none"> <li>• 802.11b: +17dBm minimum</li> <li>• 802.11g: +16dBm minimum</li> <li>• 802.11a: +17dBm minimum</li> <li>• 802.11n HT20(2.4GHz): +14dBm minimum</li> <li>• 802.11n HT40(2.4GHz): +13dBm minimum</li> <li>• 802.11n HT20(5GHz): +14dBm minimum</li> <li>• 802.11n HT40(5GHz): +13dBm minimum</li> <li>• 802.11ac VHT80(5GHz): +10dBm minimum</li> <li>• 802.11ac VHT160(5GHz): +10dBm minimum</li> <li>• 802.11ax HE40(2.4GHz): +12dBm minimum</li> <li>• 802.11ax HE80(5GHz): +10dBm minimum</li> <li>• 802.11ax HE160(5GHz): +10dBm minimum</li> <li>• 802.11ax HE80(6GHz): +10dBm minimum</li> <li>• 802.11ax HE160(6GHz): +10dBm minimum</li> </ul> |
| <b>Power Consumption</b>        | <ul style="list-style-type: none"> <li>• Transmit mode: 2.5 W</li> <li>• Receive mode: 2 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode: 50 mW (WLAN unassociated)</li> <li>• Connected Standby/Modern Standby: 10mW</li> <li>• Radio disabled: 8 mW</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Power Management</b>         | ACPI and PCI Express compliant power management<br>802.11 compliant power saving mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Receiver Sensitivity[4]</b>  | 802.11b, 1Mbps: -93.5dBm maximum<br>802.11b, 11Mbps: -84dBm maximum<br>802.11a/g, 6Mbps: -86dBm maximum<br>802.11a/g, 54Mbps: -72dBm maximum<br>802.11n, MCS07: -67dBm maximum<br>802.11n, MCS15: -64dBm maximum<br>802.11ac, MCS0(VHT80): -84dBm maximum<br>802.11ac, MCS9(VHT80): -59dBm maximum<br>802.11ac, MCS9(VHT160): -58.5dBm maximum<br>• 802.11ax, MCS11(HE40): -57dBm maximum<br>• 802.11ax, MCS11(HE80): -54dBm maximum<br>• 802.11ax, MCS11(HE160): -53.5dBm maximum                                                                                                                                                                                                            |
| <b>Antenna type</b>             | High efficiency antenna with spatial diversity<br>Two embedded tri-band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Form Factor</b>              | PCI-Express M.2 MiniCard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Dimensions</b>               | 1. Type 2230: 2.3 x 22.0 x 30.0 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Weight</b>                   | 1. Type 2230: 2.8g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Operating Voltage</b>        | 3.3v +/- 9%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Temperature</b>              | Operating: 14° to 158° F (–10° to 70° C)<br>Non-operating: –40° to 176° F (–40° to 80° C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Humidity</b>                 | Operating: 10% to 60% (non-condensing)<br>Non-operating: 5% to 95% (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Altitude</b>                 | Operating: 0 to 10,000 ft (3,048 m)<br>Non-operating: 0 to 50,000 ft (15,240 m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>LED Activity</b>             | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### Technical Specifications – Networking and Communications

| <b>HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3 Wireless Card Technology</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bluetooth Specification</b>                                                                   | 4.0/4.1/4.2/5.0/5.1/5.2/5.3 Wireless Card Compliant                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Frequency Band</b>                                                                            | 2402 to 2480 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Number of Available Channels</b>                                                              | Legacy: 0~79 (1 MHz/CH)<br>BLE: 0~39 (2 MHz/CH)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Data Rates and Throughput</b>                                                                 | Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps<br>BLE: 1 Mbps data rate; throughput up to 0.2 Mbps<br>Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels<br>Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Transmit Power</b>                                                                            | The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Power Consumption</b>                                                                         | Peak (Tx): 330 mW<br>Peak (Rx): 230 mW<br>Selective Suspend: 17 mW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Bluetooth® Software Supported Link Topology</b>                                               | Microsoft Windows Bluetooth Software                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Power Management</b>                                                                          | Microsoft Windows ACPI, and USB Bus Support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Certifications</b>                                                                            | FCC (47 CFR) Part 15C/E, Section 15.247, 15.249, 15.407<br><br>ETSI 300 328, ETSI 301 893, ETSI 303 687                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Bluetooth® Profiles Supported</b>                                                             | Bluetooth 4.1-ESR 5/6/7 Compliance<br>LE Link Layer Ping<br>LE Dual Mode<br>LE Link Layer<br>LE Low Duty Cycle Directed Advertising<br>LE L2CAP Connection Oriented Channels<br>Train Nudging & Interlaced Scan<br>Bluetooth 4.2 ESR08 Compliance<br>LE Secure Connection- Basic/Full<br>LE Privacy 1.2 –Link Layer Privacy<br>LE Privacy 1.2 –Extended Scanner Filter Policies<br>LE Data Packet Length Extension<br>FAX Profile (FAX)<br>Basic Imaging Profile (BIP)2<br>Headset Profile (HSP)<br>Hands Free Profile (HFP)<br>Advanced Audio Distribution Profile (A2DP)<br>Bluetooth 5.2<br>ESR9/10 Compliance<br>LE Advertisement Extensions<br>Channel Selection Algo<br>Limited High Duty Cycle Non-Connectable Advertising<br>2Mbps LE<br>LE Long Range<br>Windows Bluetooth profiles support<br>Bluetooth 5.3<br>Periodic Advertisement interval<br>Encryption key size control enhancements |

### Technical Specifications – Networking and Communications

1. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported. Wi-Fi 6E is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.
2. Check latest software/driver release for updates on supported security features.
3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

| HP Flex 1GbE Fiber LC Single Port      |                                                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Connector</b>                       | Fiber                                                                                                     |
| <b>Cabling</b>                         | 1 GbE over Category OM1 (or better) up to 100m                                                            |
| <b>Controller</b>                      | Microchip LAN7801                                                                                         |
| <b>Data Rates Supported</b>            | 100/1000 Mbps                                                                                             |
| <b>Compliance</b>                      | IEEE 802.1q priority encoding/tagging (QoS, CoS)<br>IEEE 802.1q VLAN tagging<br>IEEE 802.3x flow control  |
| <b>Bus Architecture</b>                | USB                                                                                                       |
| <b>Power requirement</b>               | Requires 3.3V (Integrated regulators for code Vdc)                                                        |
| <b>Boot ROM support</b>                | Yes                                                                                                       |
| <b>Network transfer mode</b>           | Full-duplex; Half duplex                                                                                  |
| <b>Network transfer rate</b>           | 100BASE-X (Half-duplex) 100Mbps<br>1000BASE-X (Half-duplex) 1000Mbps<br>1000BASE-X (Full-duplex) 2000Mbps |
| <b>Operating temperature</b>           | 32° to 95° F (0° to 35°C)                                                                                 |
| <b>calvin</b>                          | 1.5 x 1.7 x 0.75 in (3.84 x 4.3 x 1.9 cm)                                                                 |
| <b>Operating System Driver Support</b> | Windows 11 64-Bit<br>Linux®                                                                               |

### Technical Specifications – Input/Output Devices

#### I/O DEVICES

| HP 175 Antimicrobial Wired Keyboard |                                                          |                                                                      |
|-------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------|
| Physical Characteristics            | Keys                                                     | 110 keys (US);111 (UK);113 (JP, BR)                                  |
|                                     | Dimensions (LxWxH)                                       | 428.83 x 117.37 x 19.1 mm; 16.88 x 4.62 x 0.75 in                    |
|                                     | Weight                                                   | 435 g;0.96 lb                                                        |
| Electrical                          | Operating voltage                                        | 4.75~5.25V                                                           |
|                                     | Power consumption                                        | 100mA                                                                |
|                                     | System Interface                                         | USB                                                                  |
|                                     | ESD                                                      | Contact Discharge: 8 KV Air Discharge: 15 KV                         |
|                                     | Cable length                                             | 6 ft (1.8 M)                                                         |
|                                     | EMI - RFI                                                | Conforms to FCC rules for a Class B computing device                 |
| Mechanical                          | Key Structure (Switch type and feeling) (Plunger)        | Plunger, Key travel: 2.5mm +/-0.2mm at 120gf, low profile key travel |
|                                     | Key actuation                                            | 60±8g nominal peak force with tactile feedback                       |
|                                     | Key life                                                 | 10 million keystrokes (Life tester)                                  |
| Environmental                       | Operating temperature                                    | 50° to 122° F (10° to 50° C)                                         |
|                                     | Non-operating temperature                                | -32° to 140° F (-40° to 60° C)                                       |
|                                     | Operating humidity                                       | 10% to 90% (non-condensing at ambient)                               |
|                                     | Non-operating humidity                                   | 20% to 80% (non-condensing at ambient)                               |
|                                     | Drop (out of box)                                        | 6 faces, 76cm ,rigid surface                                         |
|                                     | Drop (in box)                                            | 6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm    |
| Approvals                           | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC, BIS |                                                                      |

| HP 175 Antimicrobial Wired Mouse |                                     |                                                                   |
|----------------------------------|-------------------------------------|-------------------------------------------------------------------|
| Dimensions (LxWxH)               | 123x65x39 (mm); 4.84x2.56x1.54 (in) |                                                                   |
| Weight                           | 80 (g);0.18 (lb)                    |                                                                   |
| Environmental                    | Operating temperature               | 50° to 122° F (10° to 50° C)                                      |
|                                  | Non-operating temperature           | -32° to 140° F (-40° to 60° C)                                    |
|                                  | Operating humidity                  | 10% to 90% (non-condensing at ambient)                            |
|                                  | Non-operating humidity              | 20% to 80% (non-condensing at ambient)                            |
|                                  | Drop (out of box)                   | 6 faces, 76cm, rigid surface                                      |
|                                  | Drop (in box)                       | 6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm |
| Electrical                       | Operating voltage                   | 4.75~5.25V                                                        |
|                                  | Power consumption (typical)         | 100mA                                                             |
|                                  | Resolution                          | 1,200 DPI                                                         |
|                                  | Sensor                              | Optical USB mouse sensor                                          |
|                                  | System Interface                    | USB                                                               |
|                                  | Cable length                        | 6 ft (1.8 M)                                                      |
| Regulatory approvals             | Compliant                           | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC               |

### Technical Specifications – Input/Output Devices

| HP 175 Wired Keyboard    |                                                          |                                                                      |
|--------------------------|----------------------------------------------------------|----------------------------------------------------------------------|
| Physical Characteristics | Keys                                                     | 110keys (US);111(UK);113(JP,BR)                                      |
|                          | Dimensions (LxWxH)                                       | 428.83x117.37x19.1 (mm) ;16.88 × 4.62 × 0.75 (in)                    |
|                          | Weight                                                   | 435 (g) ;0.96 (lb)                                                   |
| Electrical               | Operating voltage                                        | 4.75~5.25V                                                           |
|                          | Power consumption                                        | 100mA                                                                |
|                          | System Interface                                         | USB                                                                  |
|                          | ESD                                                      | Contact Discharge: 8 KV Air Discharge: 15 KV                         |
|                          | Cable length                                             | 6 ft (1.8 M)                                                         |
|                          | EMI - RFI                                                | Conforms to FCC rules for a Class B computing device                 |
| Mechanical               | Key Structure (Switch type and feeling) (Plunger)        | Plunger, Key travel: 2.5mm +/-0.2mm at 120gf, low profile key travel |
|                          | Key actuation                                            | 60±8g nominal peak force with tactile feedback                       |
|                          | Key life                                                 | 10 million keystrokes (Life tester)                                  |
| Environmental            | Operating temperature                                    | 50° to 122° F (10° to 50° C)                                         |
|                          | Non-operating temperature                                | -32° to 140° F (-40° to 60° C)                                       |
|                          | Operating humidity                                       | 10% to 90% (non-condensing at ambient)                               |
|                          | Non-operating humidity                                   | 20% to 80% (non-condensing at ambient)                               |
|                          | Drop (out of box)                                        | 6 faces, 76cm ,rigid surface                                         |
|                          | Drop (in box)                                            | 6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm    |
| Approvals                | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC, BIS |                                                                      |

| HP 175 Wired Mouse   |                                     |                                                                   |
|----------------------|-------------------------------------|-------------------------------------------------------------------|
| Dimensions (LxWxH)   | 123x65x39 (mm); 4.84x2.56x1.54 (in) |                                                                   |
| Weight               | 80 (g);0.18 (lb)                    |                                                                   |
| Environmental        | Operating temperature               | 50° to 122° F (10° to 50° C)                                      |
|                      | Non-operating temperature           | -32° to 140° F (-40° to 60° C)                                    |
|                      | Operating humidity                  | 10% to 90% (non-condensing at ambient)                            |
|                      | Non-operating humidity              | 20% to 80% (non-condensing at ambient)                            |
|                      | Drop (out of box)                   | 6 faces, 76cm, rigid surface                                      |
|                      | Drop (in box)                       | 6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm |
| Electrical           | Operating voltage                   | 4.75~5.25V                                                        |
|                      | Power consumption (typical)         | 100mA                                                             |
|                      | Resolution                          | 1,200 DPI                                                         |
|                      | Sensor                              | Optical USB mouse sensor                                          |
|                      | System Interface                    | USB                                                               |
|                      | Cable length                        | 6 ft (1.8 M)                                                      |
| Regulatory approvals | Compliant                           | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC               |

### Technical Specifications – Input/Output Devices

| HP 275 Wireless Keyboard |                                                                                                                                                         |                                                                      |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Physical Characteristics | Keys                                                                                                                                                    | 107keys (US); 108keys (UK); 110 keys (JP, BR)                        |
|                          | Dimensions (LxWxH)                                                                                                                                      | 428.83 x 117.37 x 19.1 mm;<br>16.88 x 4.62 x 0.75 in                 |
|                          | Weight                                                                                                                                                  | 416 (g) ;0.92 (lb)                                                   |
| Electrical               | Operating voltage                                                                                                                                       | 2.2V~3.3V (BATTERY)                                                  |
|                          | Power consumption                                                                                                                                       | 30mA                                                                 |
|                          | System Interface                                                                                                                                        | 2.4GHz Wireless                                                      |
|                          | ESD                                                                                                                                                     | Contact Discharge: 8 KV Air Discharge: 15 KV                         |
|                          | EMI - RFI                                                                                                                                               | Conforms to FCC rules for a Class B computing device                 |
| Mechanical               | Key Structure (Switch type and feeling) (Plunger)                                                                                                       | Plunger, Key travel: 2.5mm +/-0.2mm at 120gf, low profile key travel |
|                          | Key actuation                                                                                                                                           | 60±8g nominal peak force with tactile feedback                       |
|                          | Key life                                                                                                                                                | 10 million keystrokes (Life tester)                                  |
| Environmental            | Operating temperature                                                                                                                                   | 50° to 122° F (10° to 50° C)                                         |
|                          | Non-operating temperature                                                                                                                               | -32° to 140° F (-40° to 60° C)                                       |
|                          | Operating humidity                                                                                                                                      | 10% to 90% (non-condensing at ambient)                               |
|                          | Non-operating humidity                                                                                                                                  | 20% to 80% (non-condensing at ambient)                               |
|                          | Drop (out of box)                                                                                                                                       | 6 faces, 76cm, rigid surface                                         |
|                          | Drop (in box)                                                                                                                                           | 6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm    |
| Approvals                | CB; FCC; IC; UL; ENCOM; ANATEL; SUBTEL; RCM; WPC; BIS; CONATEL; TRA; CE; TUV GS; ICASA; SRRC; DJID; TELEC; VCCI; KCC; SIRIM; NTC; IMDA; NCC; BSMI; NBTC |                                                                      |

| HP 275 Wireless Mouse |                                          |                                                                                                                                                    |
|-----------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (LxWxH)    | 123 x 65 x 39 mm); 4.84 x 2.56 x 1.54 in |                                                                                                                                                    |
| Weight                | 73 g; 0.161 lb (no Battery)              |                                                                                                                                                    |
| Environmental         | Operating temperature                    | 50° to 122° F (10° to 50° C)                                                                                                                       |
|                       | Non-operating temperature                | -32° to 140° F (-40° to 60° C)                                                                                                                     |
|                       | Operating humidity                       | 10% to 90% (non-condensing at ambient)                                                                                                             |
|                       | Non-operating humidity                   | 20% to 80% (non-condensing at ambient)                                                                                                             |
|                       | Drop (out of box)                        | 6 faces, 76cm, rigid surface                                                                                                                       |
|                       | Drop (in box)                            | 6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm                                                                                  |
| Electrical            | Operating voltage                        | 1.5VDC                                                                                                                                             |
|                       | Power consumption (typical)              | 30mA                                                                                                                                               |
|                       | Resolution                               | 1,200 DPI                                                                                                                                          |
|                       | Sensor                                   | Optical mouse sensor                                                                                                                               |
|                       | System Interface                         | 2.4GHz Wireless                                                                                                                                    |
|                       | Cable length                             | NA                                                                                                                                                 |
| Regulatory approvals  | Compliant                                | CB; FCC; IC; UL; ENCOM; ANATEL; SUBTEL; RCM; WPC; CONATEL; TRA; CE; TUV GS; ICASA; SRRC; DJID; TELEC; VCCI; KCC; SIRIM; NTC; IMDA; NCC; BSMI; NBTC |

AUDIO/MULTIMEDIA

HP EliteDesk 8 Mini G2i Desktop Next Gen AI PC

|                            |                                                                                                                                                                          |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                       | Integrated                                                                                                                                                               |
| HD Stereo Codec            | Realtek ALC3252                                                                                                                                                          |
| Audio I/O Ports            | combo audio jack with CTIA and OMTP headset support                                                                                                                      |
| Internal Speaker Amplifier | 2W class D mono amplifier for the internal speaker only. External speakers must be powered                                                                               |
| Multi-streaming Capable    | Playback multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the front and rear jacks or integrated speaker. |
| Sampling                   | Independent sampling rates for DAC's and ADC's; supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and 44.1 kHz to 192 kHz for ADC                      |
| Wavetable Syntheses        | Yes - Uses OS soft wavetable                                                                                                                                             |
| Analog Audio               | Yes                                                                                                                                                                      |
| # of Channels on Line-Out  | Stereo (Left & Right channels)                                                                                                                                           |
| Internal Speaker           | Yes                                                                                                                                                                      |

### Technical Specifications – Power

#### POWER

##### HP EliteDesk 8 Mini G2i Desktop Next Gen AI PC

##### Unit Environment and Operating Conditions

|                                     |                                                                                                                                      |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Temperature Range                   | Operating: 5°C ~35°C<br>Non-Operating: -40°C ~66°C                                                                                   |
| Relative Humidity                   | Operating 5% to 90% relative humidity at max inlet temperature<br>Non-Operating 5% to 90% relative humidity at max inlet temperature |
| Maximum Altitude<br>(unpressurized) | Operating: 5000m<br>Non-operating: 50,000 ft. (15240 m)                                                                              |

|                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>External Power Supplies<sup>1</sup></b>                     | 90W EPS, active PFC, 88% average efficiency at 115V & 89% at 230Vac<br>100W EPS Wall mount Type-C <sup>2</sup> , active PFC, 88% average efficiency at 115V & 89% at 230Vac<br>120W EPS, active PFC, 88% average efficiency at 115V & 89% at 230Vac<br>150W EPS, active PFC, 88% efficiency in 115Vac / 89% efficiency in 230Vac<br>180W EPS, active PFC, 88% average efficiency at 115V & 89% at 230Vac                                                                                                                      |
| <b>Operating Voltage Range</b>                                 | 90Vac~264Vac                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Rated Voltage Range</b>                                     | 100Vac~240Vac                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Rated Line Frequency</b>                                    | 50HZ~60HZ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Operating Line Frequency</b>                                | 47HZ~63HZ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Rated Input Current with Energy Efficient* Power Supply</b> | 90W ≤ 1.7A<br>100W ≤ 1.6A<br>120W ≤ 1.7A<br>150W ≤ 2.5A<br>180W ≤ 2.5A                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>DC Output</b>                                               | +19.5V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Current Leakage<br/>(NFPA 99: 2012)</b>                     | Less than 40 microamps of leakage current at 250 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.<br>Less than 40 microamps of leakage current at 250 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. |
| <b>Power cord length</b>                                       | 6.0 ft. (1.83 m) <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>External Power Adapter</b>                                  | External power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Dimensions</b>                                              | 90W: 127 x 51 x 30 mm<br>100W: 32x56.5x60 mm<br>120W: 138 x 68.5 x 25.4 mm<br>150W: 148 x 75.5 x 25.4 mm<br>180W: 165.5 x 75.9 x 25.4 mm                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Total Cord Length</b>                                       | 1 m, 6.0 ft. (1.83 m) <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

Technical Specifications – Power

- 1. External power supplies, power cords, cables and peripherals are not low halogen. Service parts obtained after purchase may not be low halogen.
- 2 Power cord length will be varied from different type of cords start from 1.8m.
- 3. The length of India power cord is 2.0m.

The power supply shall comply with harmonic input current requirements as detailed in EN61000-3-2 and JEIDA MITI standards. The harmonic input current requirements must be met under the following operating conditions:  
Load Requirements: 50% and 100%  
Input Voltage: 230Vac/50Hz.  
For active power factor correction the power factor at 50% &100% loads shall be greater than 0.9 over the entire nominal input voltage range (100-127VAC and 200-240VAC).

| Condition          | Standard Efficiency | 82/85/82% | 85/88/85% | 87/90/87% | 90/92/89% | Input Voltage |
|--------------------|---------------------|-----------|-----------|-----------|-----------|---------------|
| 10% of Rated Load  | -                   | 75%       | 81%       | 84%       | 86%       | 115Vac/60HZ   |
| 20% of Rated Load  | -                   | 82%       | 85%       | 87%       | 90%       | 115Vac/60HZ   |
| 50% of Rated Load  | -                   | 85%       | 88%       | 90%       | 92%       | 115Vac/60HZ   |
|                    | PF>0.9              | PF>0.9    | PF>0.9    | PF>0.9    | PF>0.95   | 115Vac/60HZ   |
| 100% of Rated Load | 70%                 | 82%       | 85%       | 87%       | 89%       | 115Vac/60HZ   |
|                    | PF>0.9              | PF>0.9    | PF>0.9    | PF>0.9    | PF>0.9    | 230Vac/50HZ   |



### Technical Specifications – Weights and Dimensions

#### WEIGHTS & DIMENSIONS

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Chassis (WxDxH)</b>                        | 6.97 x 7.13 x 1.35 in<br>(177 x 181 x 34 mm)                                                                                                                                                                                                                                                                                                                                                                             |
| <b>System Volume</b>                          | 66.86 cu in<br>(1.09 L)                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Standard System Weight</b>                 | 2.97lbs (1.35kg)                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Heavy Configuration Weight</b>             | N/A                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Stand Dimensions (WxDxH)</b>               | 117 x 160 x 20 mm                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Packaging (WxDxH)</b>                      | Packaging 1:<br>18.9 x 4.1 x 9.4 in<br>(481 x 105 x 240 mm)<br><br>Packaging 2 <sup>1</sup> :<br>19.6 x 5.2 x 9.3 in<br>498(L) x 132(W) x 235(H) mm                                                                                                                                                                                                                                                                      |
| <b>Shipping Weight</b>                        | 3.18 kg <sup>2</sup><br>6.95 lb <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Multipack Packaging</b>                    | 20.28 x 16.54 x 25 in<br>(515 x 420 x 636 mm)                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Palletization Profile</b><br>(Molded Pulp) | Palletization 1:<br>22-units per layer<br>8 layers max<br>176 units per pallet<br>46.14 x 37.87 x 81.10 in<br>(1155 x 962 x 2060 mm)<br>(including pallet)<br><br>Palletization 2:<br>10-units per layer<br>10 to 19 layers max<br>depending on details of<br>freight<br>100 or 190 units per pallet<br>depending on details of<br>freight<br>46.26 x 39.21 x 103.74 in,<br>(1175 x 996 x 2635 mm)<br>(including pallet) |

1. Only available on selected US, Brazil, India & Japan SKU

2. Actual weight depends on configuration.

NOTE: Packaging material used will vary by country.

NOTE: The palletization is for single pack.

NOTE: Palletization options depend on the factories.

## MISCELLANEOUS FEATURES

### Management Features

- Advanced Configuration and Power Management interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel® Wired for Management support; industry wide initiative to make Intel® architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

### Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
  - Power LED will blink red 2 to 5 times, then blink white 2 or more times, then repeat (with beep tones for each blink initially):
    - 2 red + 2 white User must provide file for BIOS recovery (USB storage typically)
    - 2 red + 3 white User must enter a key sequence to proceed with recovery by policy
    - 2 red + 4 white BIOS recovery is in progress
    - 3 red + 2 white Memory could not be initialized
    - 3 red + 3 white Graphics adaptor could not be found
    - 3 red + 4 white Power supply failure / not connected
    - 3 red + 5 white Processor not installed
    - 3 red + 6 white Current processor does not support an enabled feature
    - 4 red + 2 white Processor has exceeded its temperature threshold / system thermal shutdown
    - 4 red + 3 white System internal temperature has exceeded its threshold
    - 5 red + 2 white System controller firmware is not valid
    - 5 red + 3 white System controller detected BIOS is not executing
    - 5 red + 4 white BIOS could not complete initialization / PCA failure
    - 5 red + 5 white System controller rebooted the system after a health or recovery timer triggered
- HP PC Hardware Diagnostics UEFI:
  - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery
- Holder for easy replacement
- 1 Aux Power LED on System PCA
- Over-Temp Warning on Screen (Requires IM Agents)
- DIMM Connectors for easy Upgrade
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power button LED – To indicate Normal Operations and Fault Conditions
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board
- Tool-less Hard Drive, CD & Diskette Removal (For MT, SFF, and DM only)
- Blue Pull Tabs, and Quick Release Latches for easy identification

### Technical Specifications – Miscellaneous features

| Additional Features                                                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tower Orientation</b>                                                     | Product can be oriented as either a desktop (horizontal) or a tower (vertical) for Tower, SFF, and Mini only. SFF/Mini requires optional stand.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Drive Lock</b>                                                            | Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Boot Sectors Protection</b>                                               | MBR and GPT sectors of the hard drive are critical to booting the operating system. By saving the MBR or GPT data (depending on the how the OS was installed), the BIOS will be able to monitor for changes and allow the user to override them with the backup copy at boot-up.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Drive Protection System</b>                                               | <p>DPS Access through F10 Setup during Boot (for SATA hard drive only)</p> <p>A diagnostic hard drive self- test. it scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user</p> <p>Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced</p> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures</p> |
| <b>SMART Technology (Self-Monitoring, Analysis and Reporting Technology)</b> | Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>SMART I - Drive Failure Prediction</b>                                    | Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>SMART II - Off-Line Data Collection</b>                                   | By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>SMART III – Off-Line Read Scanning with Defect Reallocation</b>           | IOEDC: I/O Error Detection Circuitry                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>SMART IV – End-to-End CRC for hard drives</b>                             | Detects errors in Read/Write buffers on HDD cache RAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

#### AFTER MARKET OPTIONS

| Graphics Solutions                 | Part Number |
|------------------------------------|-------------|
| HP HDMI Standard Cable Kit         | T6F94AA     |
| HP HDMI to VGA Adapter             | H4F02AA     |
| HP DisplayPort to VGA Adapter      | F7W97AA     |
| HP DisplayPort to DVI-D Adapter    | F7W96AA     |
| HP DisplayPort to HDMI 1.4 Adapter | F3W43AA     |
| HP DisplayPort to HDMI Adapter     | 2JA63AA     |
| HP USB-C to DisplayPort Adapter G2 | 8Y8Y1AA     |
| HP USB-C to HDMI 2.0 Adapter       | 1WC36AA     |
| HP USB-C to USB 3.0 Adapter        | N2Z63AA     |

| Desktop Mini Accessories                                                                                        | Part Number |
|-----------------------------------------------------------------------------------------------------------------|-------------|
| HP Desktop Mini 90W Power Supply Kit                                                                            | L4R65AA     |
| HP Desktop Mini v4+ VESA Sleeve (95W and discrete GPU skus not supported)                                       | 99T54AA     |
| HP Desktop Mini v4+ VESA Sleeve with Power Supply Holder (Discrete GPU skus not supported)                      | 99T55AA     |
| HP 150W Elite Mini EPS Holder*                                                                                  | 657R3AA     |
| HP B200 PC Mounting Bracket                                                                                     | 762T5AA     |
| HP B250 PC Mounting Bracket                                                                                     | 8RA46AA     |
| HP B300 PC Mounting Bracket                                                                                     | 2DW53AA     |
| HP B300 PC Mounting Bracket with Power Supply Holder<br>(Discrete GPU skus and 150W/180W adapter not supported) | 7DB37AA     |
| HP B550 PC Mounting Bracket                                                                                     | 16U00AA     |
| HP B560 PC Mounting Bracket                                                                                     | 763U8AA     |
| HP Z Display B600 PC Mounting Bracket                                                                           | 529H3AA     |
| HP Quick Release Bracket 2                                                                                      | 6KD15AA     |
| HP Desktop Mini Vertical Chassis Stand                                                                          | G1K23AA     |
| HP Desktop Mini v4 Port Cover                                                                                   | B6BS6AA     |

**NOTE\*:** Compatible with HP B300 PC Mounting Bracket (2DW53AA) and HP Desktop Mini v4+ VESA Sleeve (99T54AA)

### Technical Specifications – After Market Options

| Input Devices                                                      | Part Number |
|--------------------------------------------------------------------|-------------|
| HP Business Slim v2 Smart Card USB Keyboard                        | A71J9AA     |
| HP 128 Laser Wired Mouse                                           | 265D9AA     |
| HP 405 Multi-Device Wired Backlit Keyboard                         | 7N7C1AA     |
| HP 475 Dual-Mode Keyboard                                          | 7N7B9UT     |
| HP 515 Ultra-Fast Rechargeable Wireless Mouse                      | 9C2F7AA     |
| HP 685 Comfort Dual-Mode Keyboard                                  | 8T6L9UT     |
| HP 685 Comfort Dual-Mode Mouse                                     | 8T6M0UT     |
| HP 685 Comfort Dual-Mode Keyboard and Mouse Combo                  | 8T6L7UT     |
| HP 725 Multi-Device Rechargeable Wireless Keyboard                 | 9T5B2AA     |
| HP 725 Multi-Device Rechargeable Wireless Keyboard and Mouse Combo | 9T5B0UT     |

| System Memory            | Part Number |
|--------------------------|-------------|
| HP 8GB DDR5-5600 SODIMM  | B8CA1AA     |
| HP 16GB DDR5-5600 SODIMM | B8CA2AA     |
| HP 32GB DDR5-5600 SODIMM | B8CA3AA     |

| Multimedia Devices                      | Part Number |
|-----------------------------------------|-------------|
| HP S101 Speaker Bar                     | 5UU40AA     |
| HP Z G3 Conferencing Speaker Bar wStand | 647Y2AA     |

| Security Devices                | Part Number |
|---------------------------------|-------------|
| HP Keyed Cable Lock 10mm        | T1A62AA     |
| HP Master Keyed Cable Lock 10mm | T1A63AA     |

| I/O Devices                                                               | Part Number |
|---------------------------------------------------------------------------|-------------|
| HP VGA Flex IO v3                                                         | B6BT0AA     |
| HP DisplayPort 2.1 Flex IO v3                                             | B6BS8AA     |
| HP HDMI 2.1 Flex IO v3                                                    | B6BS9AA     |
| HP Thunderbolt 4™ Flex IO v3                                              | B6BT1AA     |
| HP Dual Type-C 3.2 Gen2 Flex IO v3                                        | B6BT5AA     |
| HP USB 3.2 Gen1 x2 Module Flex IO v2 (Not Available on discrete GPU SKUs) | 13L58AA     |
| HP USB to Serial Port Adapter                                             | J7B60AA     |
| HP Serial Port Flex IO v2                                                 | 5B895AA     |
| HP Z2 2.5GbE LAN Flex Port                                                | B96W7AA     |
| HP Flex 1GbE Fiber LC Single Port                                         | 20J15AA     |
| HP USB External DVD RW Drive                                              | F2B56AA     |

**NOTE:** For more detail on HP I/O Devices please refer to the HP FLEX IO v3 Option Cards QuickSpecs:  
<https://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c06712909>

Change Log

© Copyright 2026 HP Development Company, L.P.  
The Information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. intel, Celeron, Core, Pentium are registered trademarks or trademarks of intel Corporation in the U.S. and/or other countries. Bluetooth® is a trademark of Its proprietor, used by HP, inc. under license. USB Type-C® and USB-C® are trademarks of USB implementers Forum. NVIDIA, GeForce and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. AMD and Radeon are trademarks of Advanced Micro Devices, inc. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) In the United States and other countries.

| Date            | Version History | Action     | Description of Change                                           |
|-----------------|-----------------|------------|-----------------------------------------------------------------|
| April 14, 2026  | From v1 to v2   | Removal    | Core™ Ultra 5-332 and Core™ Ultra 7-365 removed from Processors |
| June 2, 2026    | From v2 to v3   | Correction | Flex port rear call out options corrected                       |
| August 5, 2026  | From v3 to v4   | Correction | TPM 2.0 specifications updated in Security section              |
| August 18, 2026 | From v4 to v5   | Correction | TPM 2.0 specifications updated in Security section              |
| August 24, 2026 | From v5 to v6   | Correction | Standard System Weight corrected                                |
|                 | From v6 to v7   |            |                                                                 |
|                 | From v7 to v8   |            |                                                                 |
|                 | From v8 to v9   |            |                                                                 |
|                 | From v9 to v10  |            |                                                                 |
|                 | From v10 to v11 |            |                                                                 |
|                 | From v11 to v12 |            |                                                                 |
|                 | From v12 to v13 |            |                                                                 |
|                 | From v13 to v14 |            |                                                                 |
|                 | From v14 to v15 |            |                                                                 |
|                 | From v15 to v16 |            |                                                                 |
|                 | From v16 to v17 |            |                                                                 |
|                 | From v17 to v18 |            |                                                                 |
|                 | From v18 to v19 |            |                                                                 |
|                 | From v19 to v20 |            |                                                                 |
|                 | From v20 to v21 |            |                                                                 |
|                 | From v21 to v22 |            |                                                                 |
|                 | From v22 to v23 |            |                                                                 |
|                 | From v23 to v24 |            |                                                                 |
|                 | From v24 to v25 |            |                                                                 |
|                 | From v25 to v26 |            |                                                                 |
|                 | From v26 to v27 |            |                                                                 |